

DATE: 18 APRIL 2005

CONSTRUCTION SET


SHEET TITLE: LANDSCAPE CONSTRUCTION DETAILS

DRAWN BY: PCD
CHECKED BY: VL
JOB NO: BSA 02-03

SHEET L5.1

MOUNTAIN VIEW SENIOR CENTER

266 ESCUELA AVE
MOUNTAIN VIEW, CA

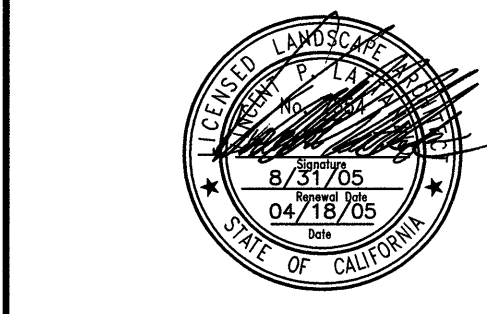

**MOUNTAIN VIEW
SENIOR CENTER**
266 ESCUELA AVE
MOUNTAIN VIEW, CA

DATE: 18 APRIL 2005

CONSTRUCTION
SET


SHEET TITLE:
**LANDSCAPE
CONSTRUCTION
DETAILS**

DRAWN BY: PCD
CHECKED BY: VL
JOB NO: BSA 02-03
SHEET
L5.2


FENCE SCHEDULE

"H" MAX HEIGHT ABOVE FINISH GRADE	DIAMETER AND WEIGHT OF GATE AND CORNER POSTS	DIAMETER AND WEIGHT OF LINE POSTS	HORIZONTAL RAILS	MAXIMUM POST SPACING
4'-0" FENCE	4" OD SCHEDULE 40	1 7/8" OD SCHEDULE 40	1 5/8" OD SCHEDULE 40 W/ CENTER RAIL TOP AND BOTTOM RAIL	8'-0" OC

SEE FENCE SCHEDULE FOR OC SPACING, SEE LAYOUT
PLAN FOR # OF POSTS,
SPACE LINE POSTS EQUALLY
BETWEEN TERMINAL POSTS

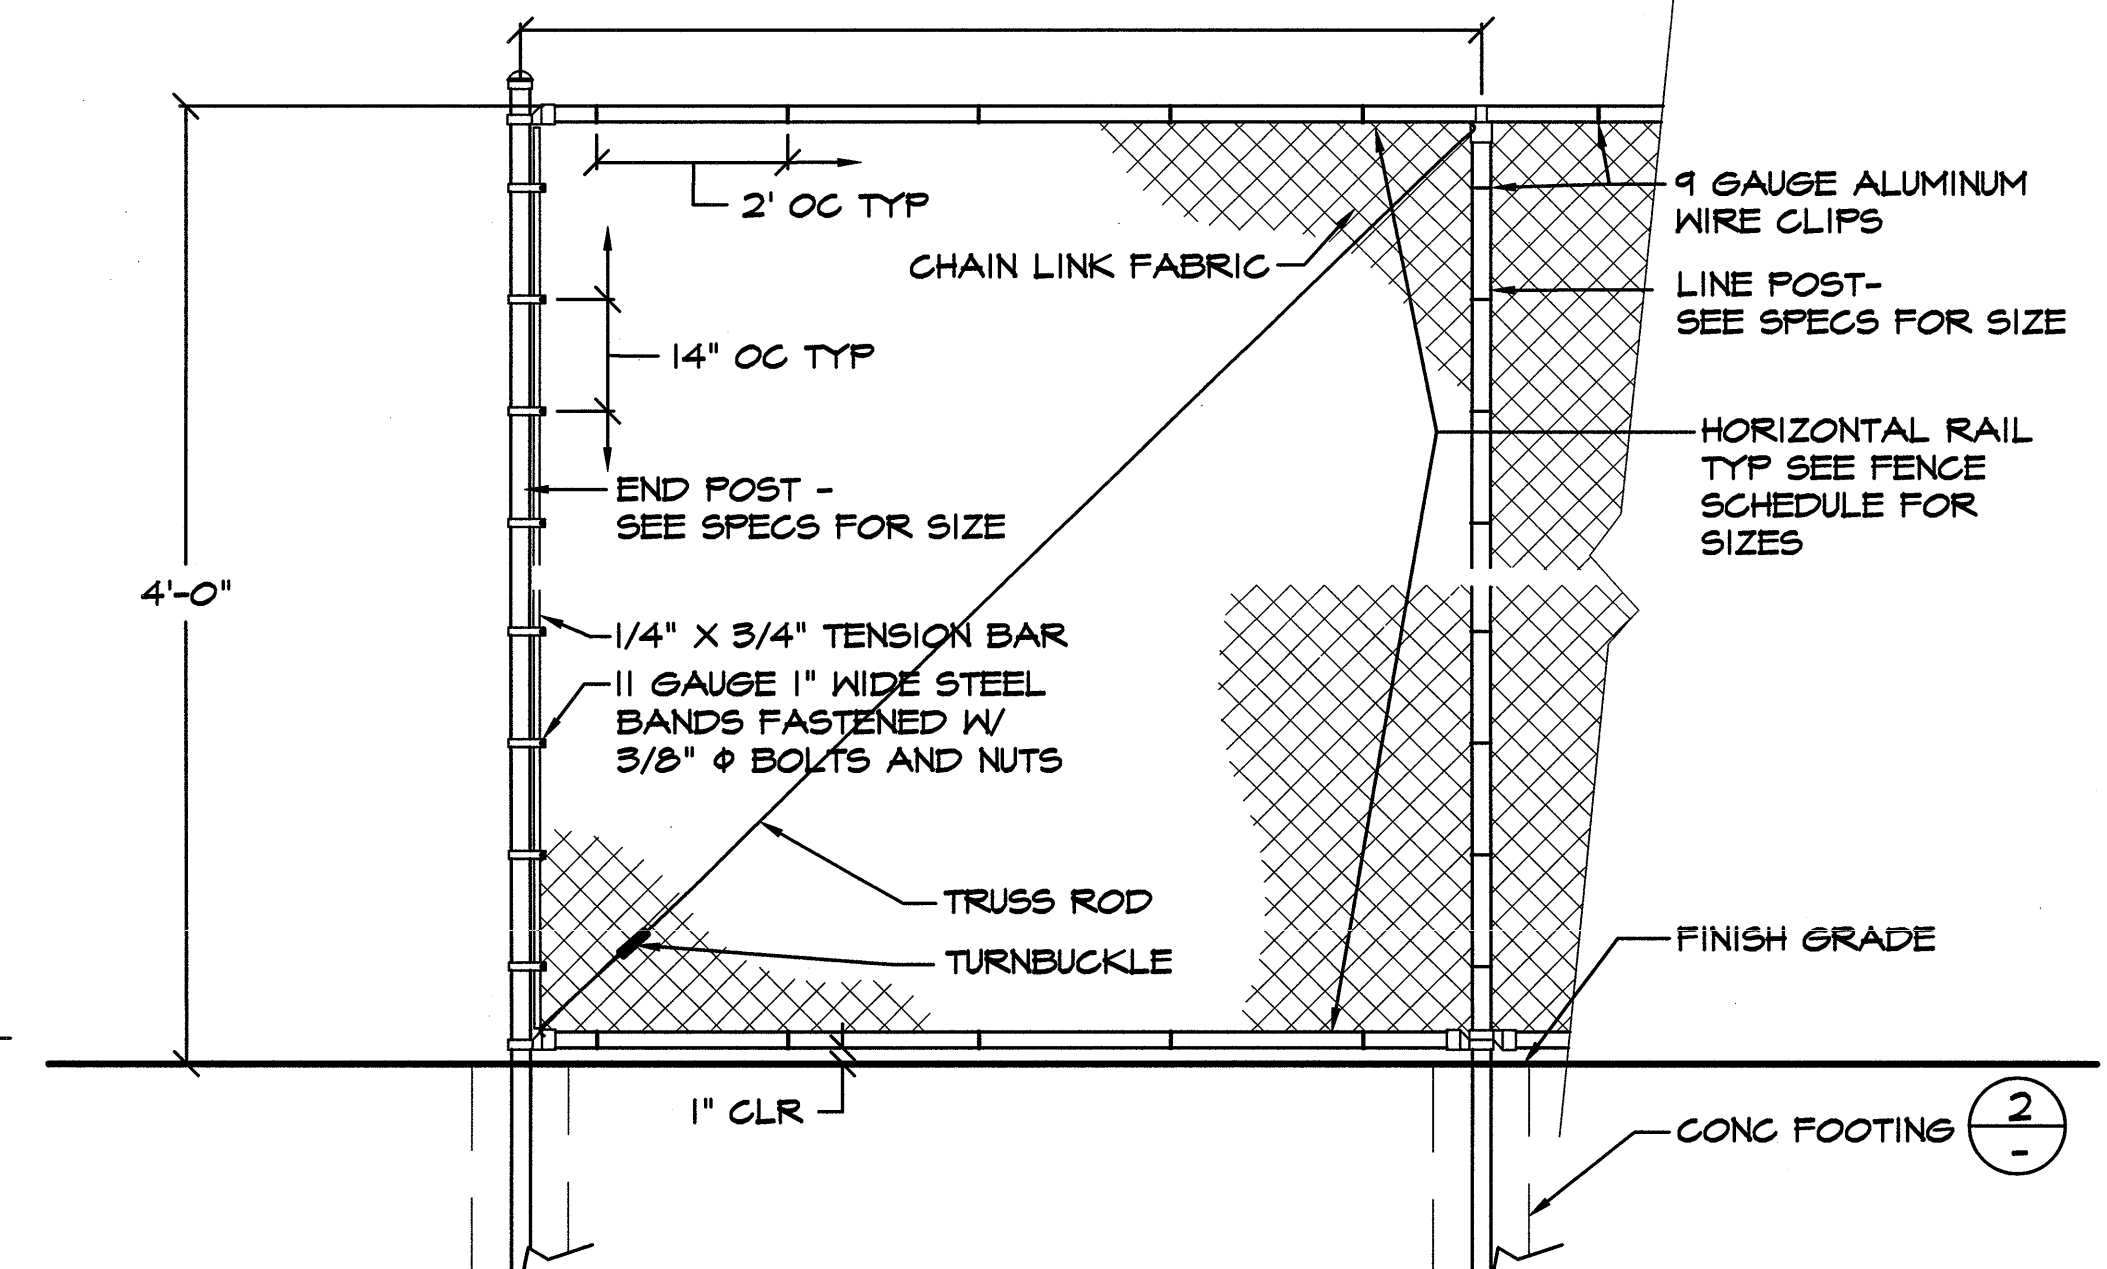


NOTE: ATTACHED FABRIC TO THE SIDE OF FENCE AWAY FROM THE SENIOR GARDENS
TYPICAL CHAIN LINK FENCE ELEVATION

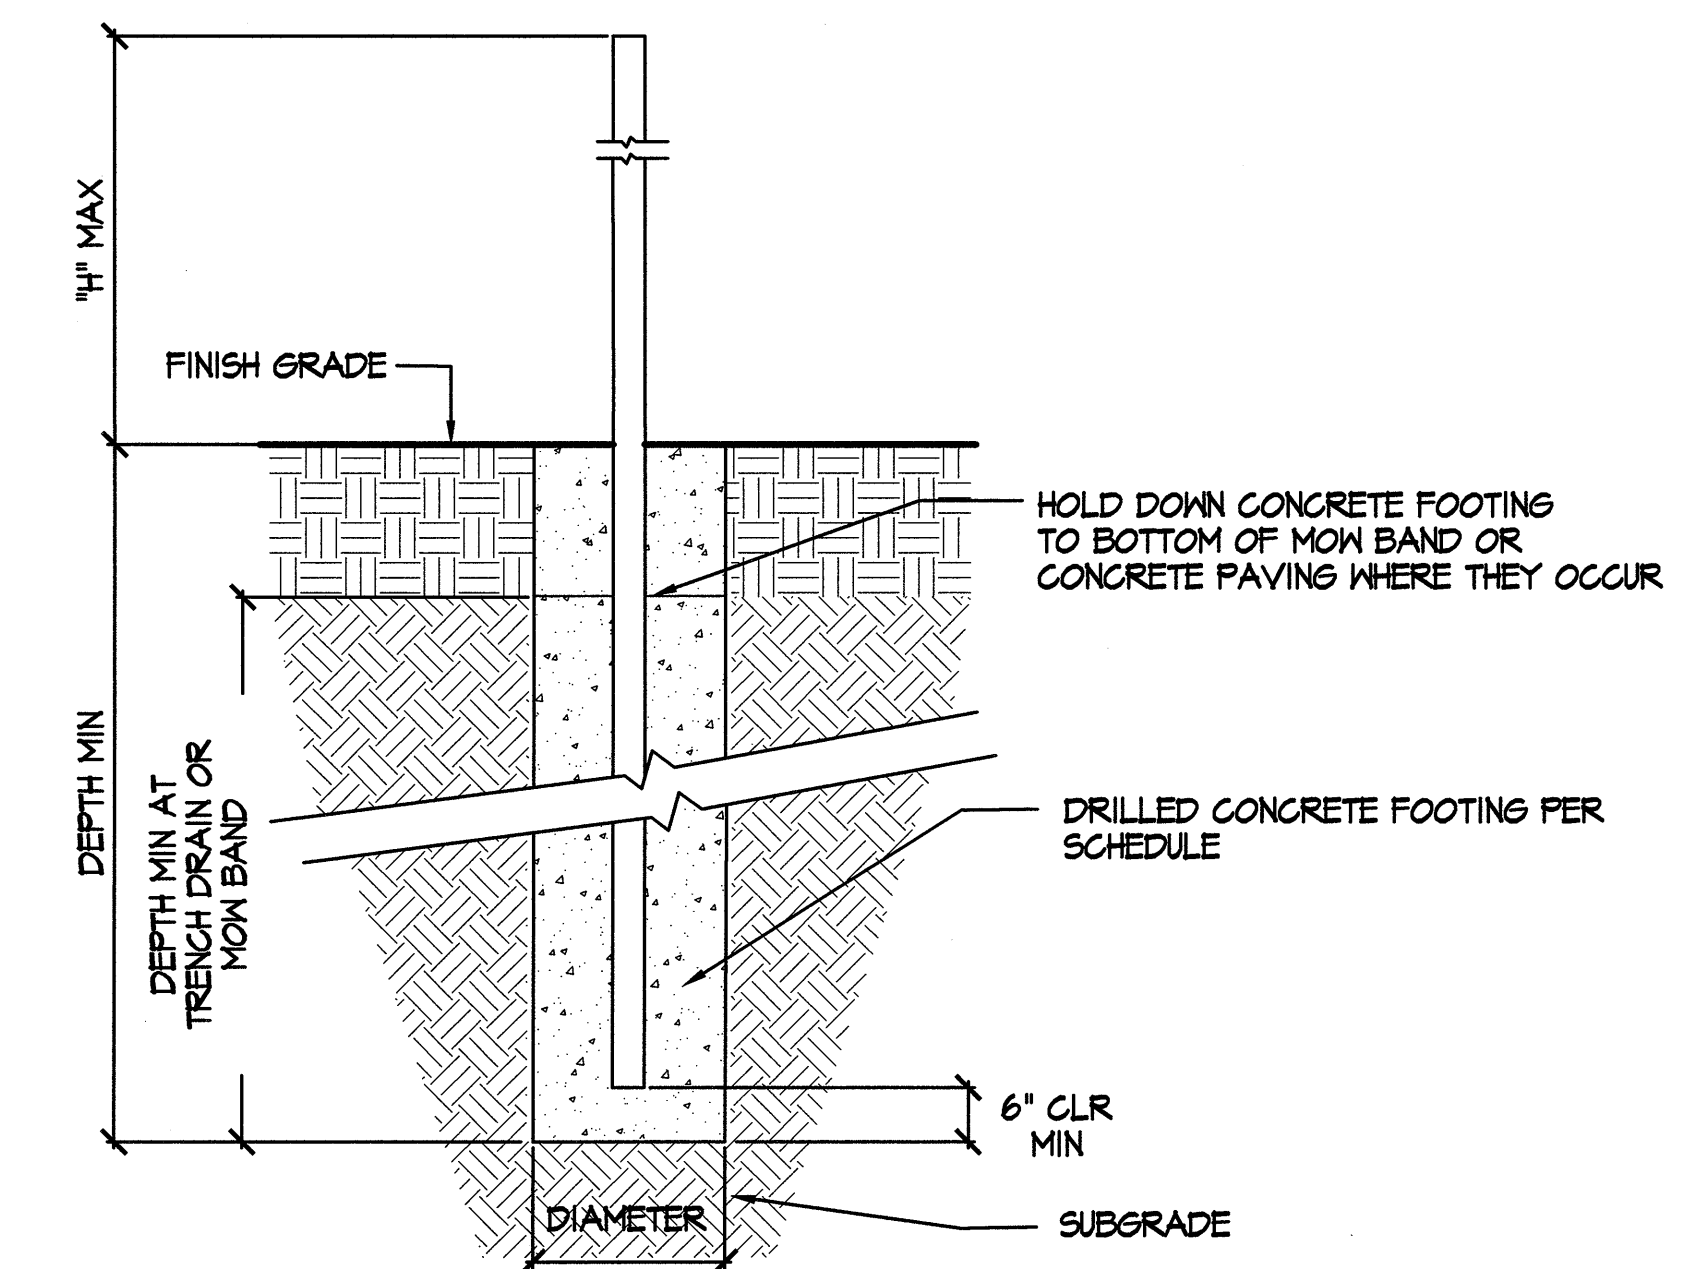


CONCRETE FOOTING SCHEDULE (PIERS)			
H= HEIGHT	DIAMETER	DEPTH	REMARKS
4'-0" FENCE	10"	30"	

2 CONCRETE FENCE FOOTING


GATE/OPENING	LENGTH (L)	GATE POSTS (G)	BAYS	OVERHANG
INSIDE POST FACE TO INSIDE POST FACE	OUTSIDE DIM OF GATE LEAF	OUTSIDE POST FACE TO OUTSIDE POST FACE	NUMBER OF BAYS WITH CHAIN LINK	NUMBER OF BAYS WITHOUT CHAIN LINK
12'-0"	19'-4"	7'-6"	(2) TWO	(1) ONE

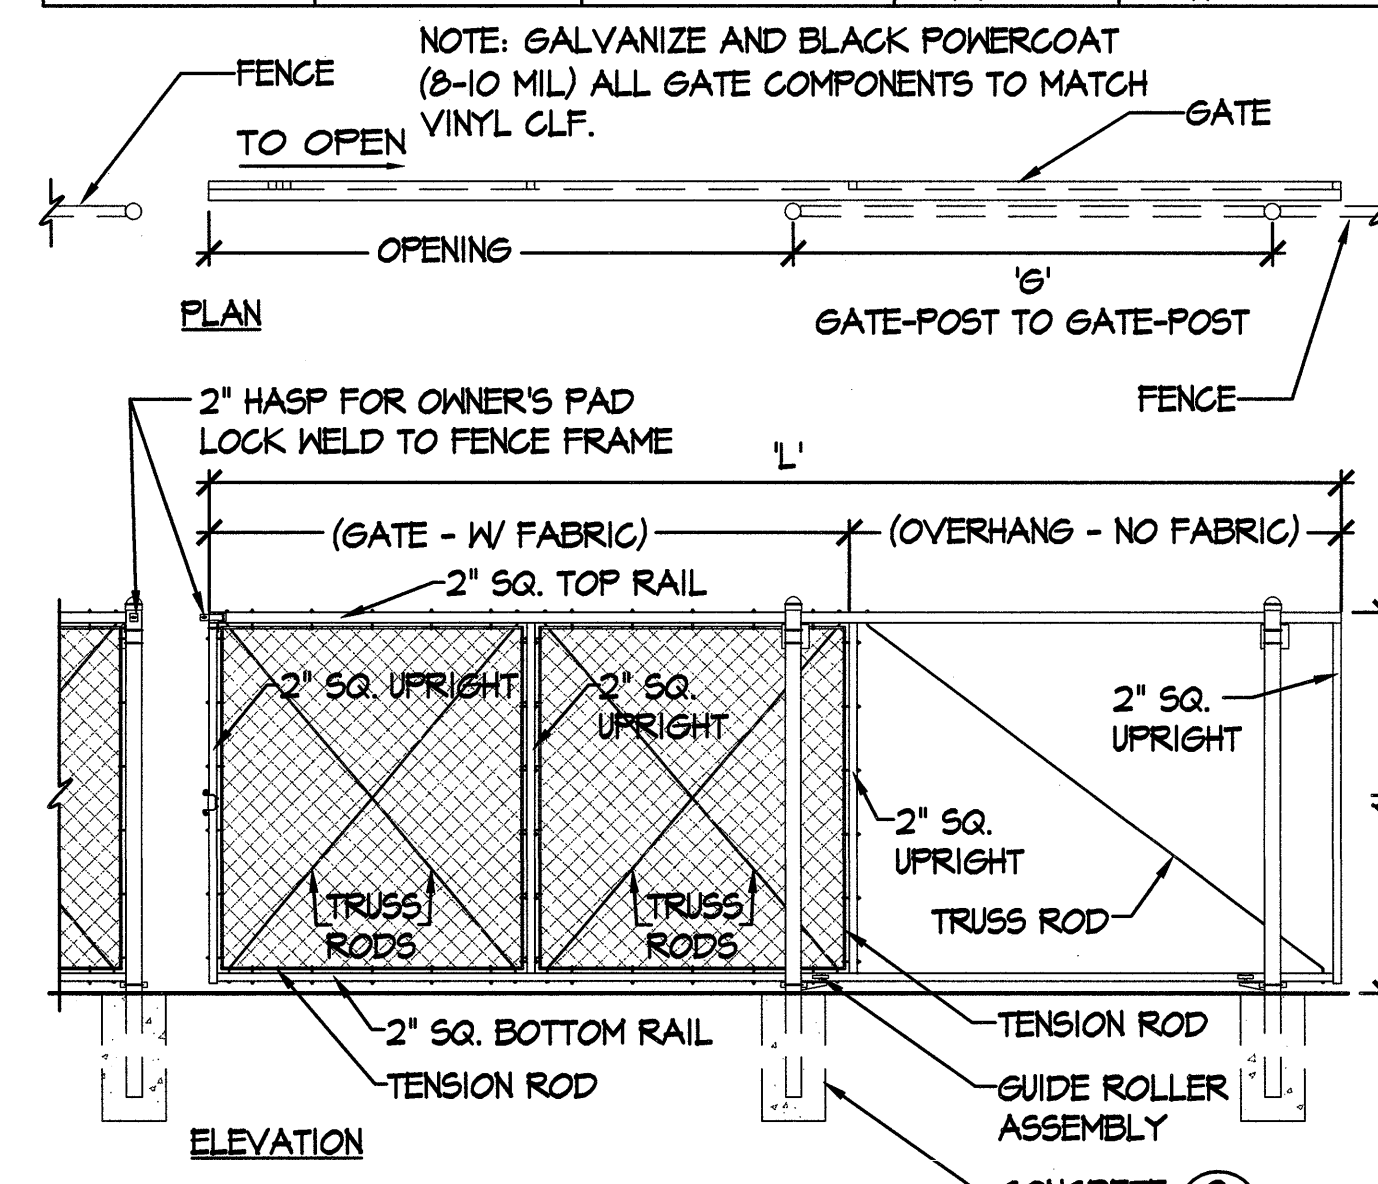

3 SLIDING GATE

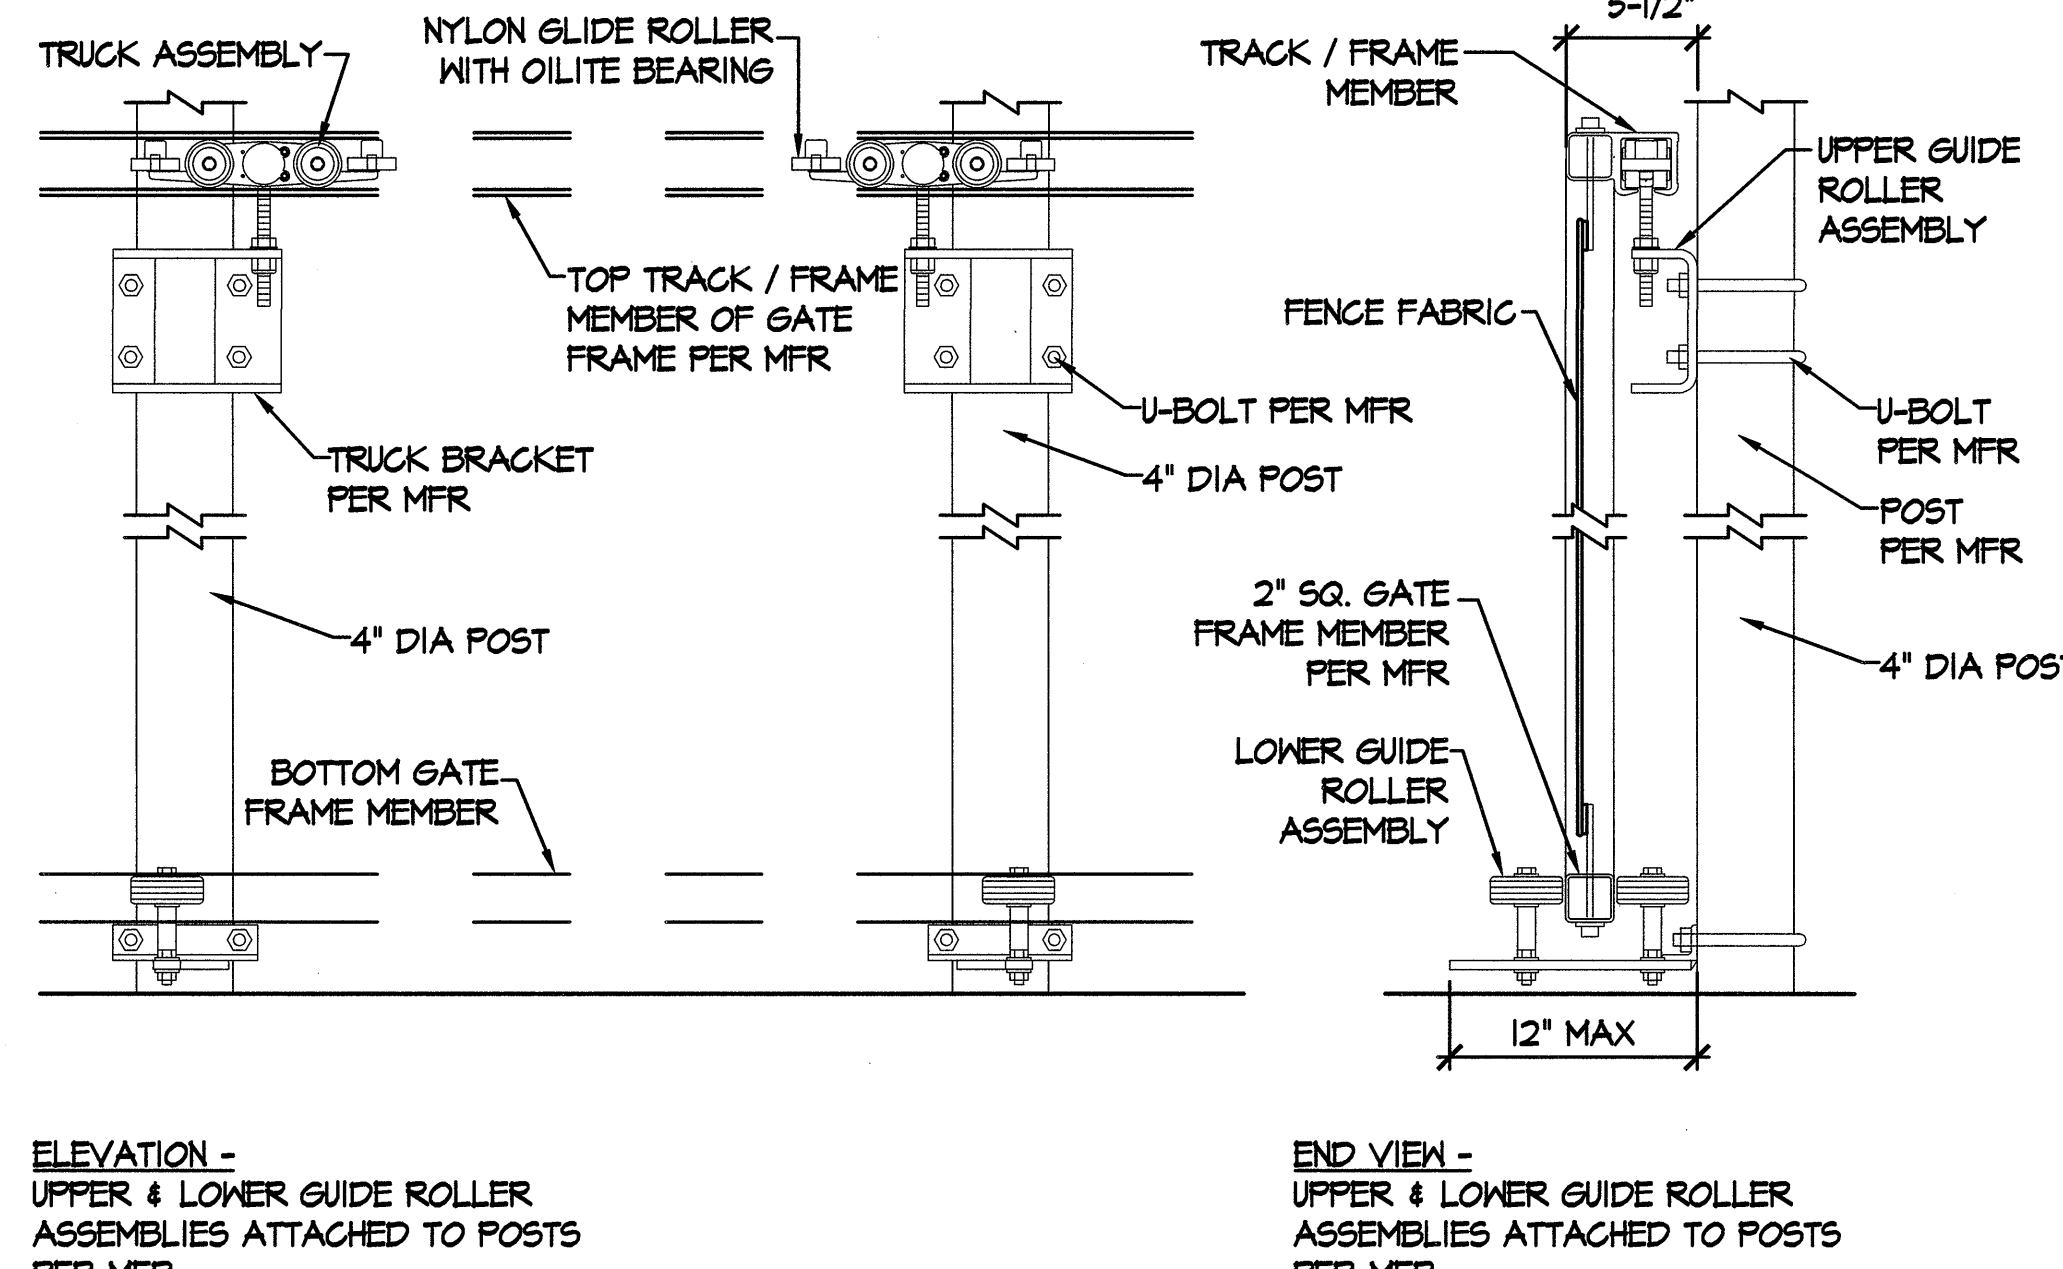


4 SLIDING GATE TRACK SYSTEM

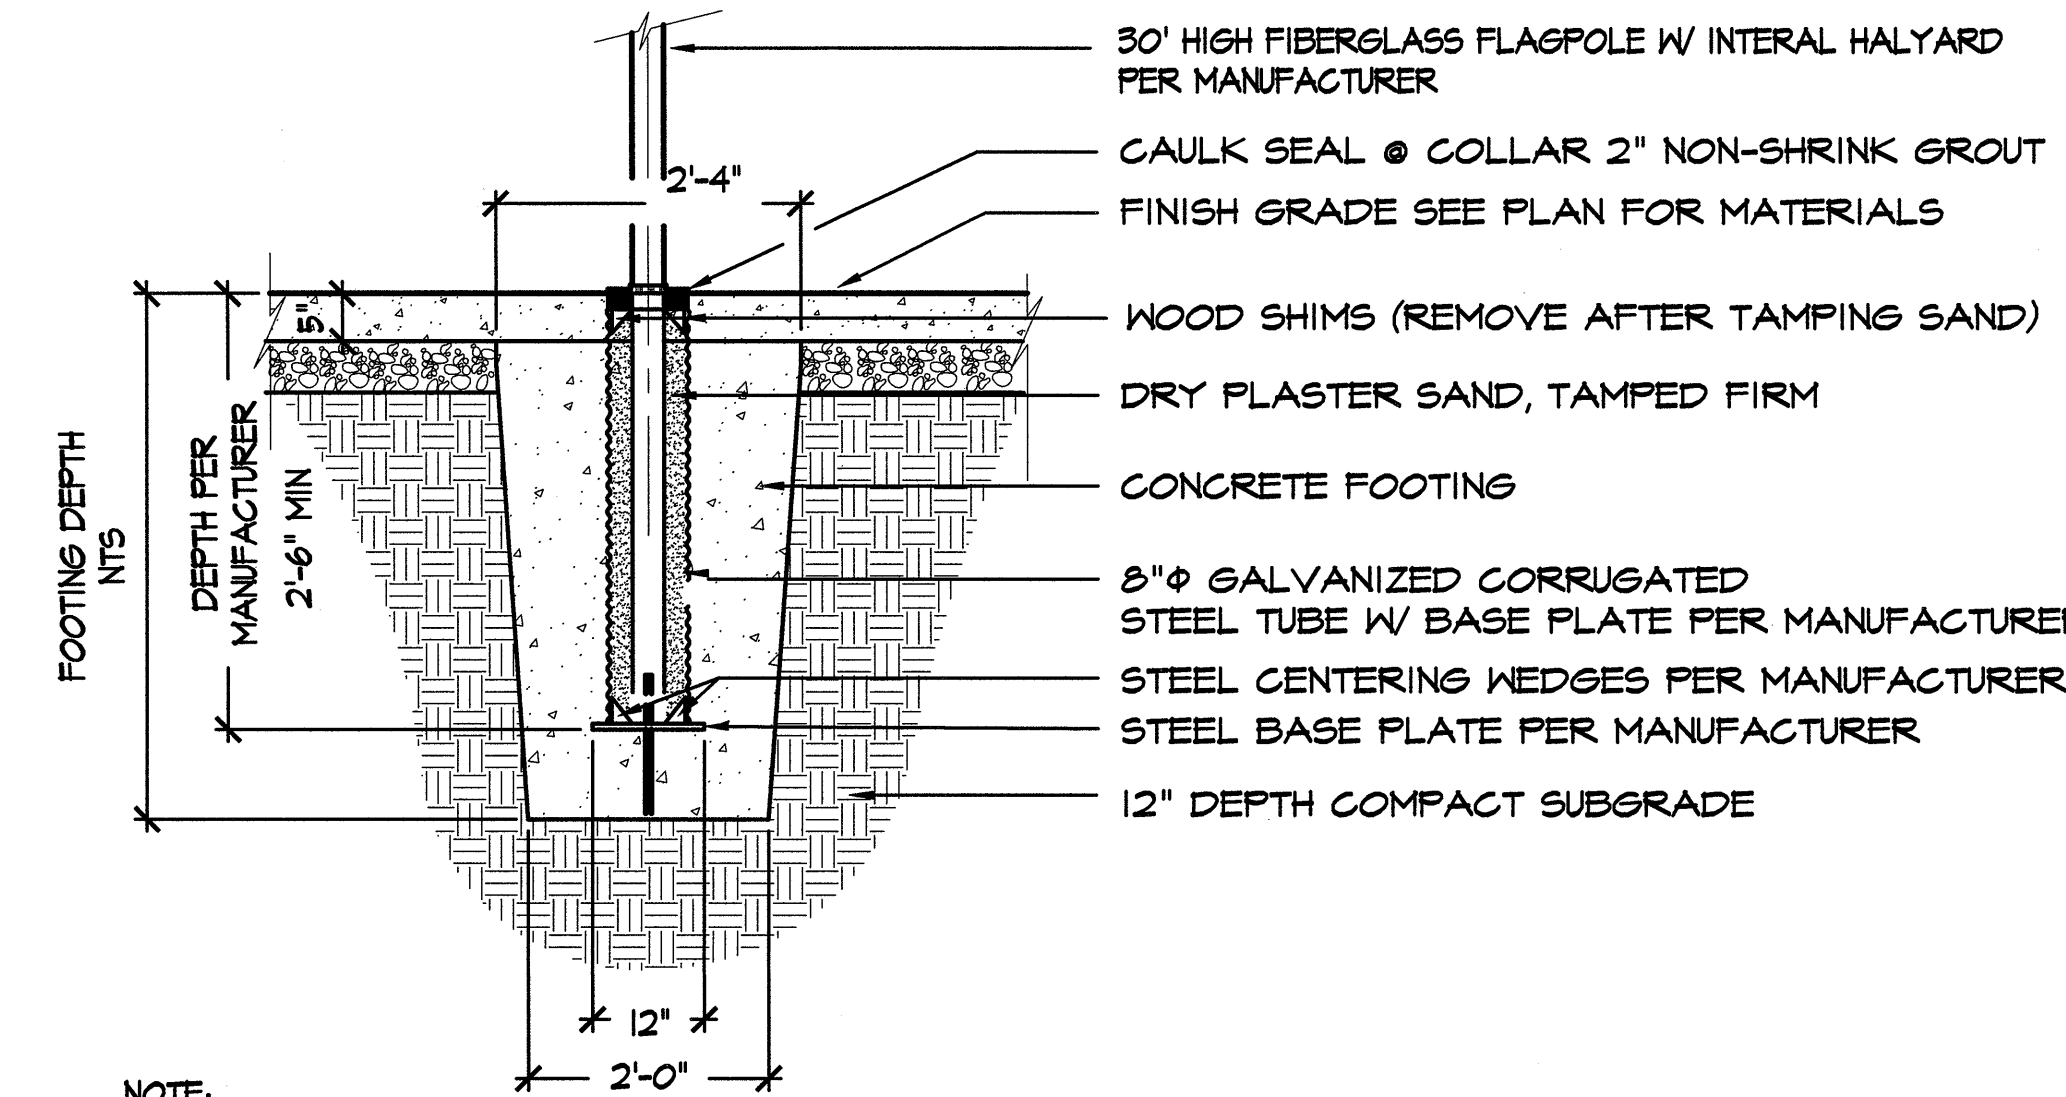


NOTE: FLAGPOLE DEPICTED FOR BIDDING ONLY. REFER TO MANUFACTURER'S SHOP DRAWINGS FOR INSTALLATION DIMENSIONS AND INSTRUCTIONS

6 30' FIBERGLASS FLAGPOLE

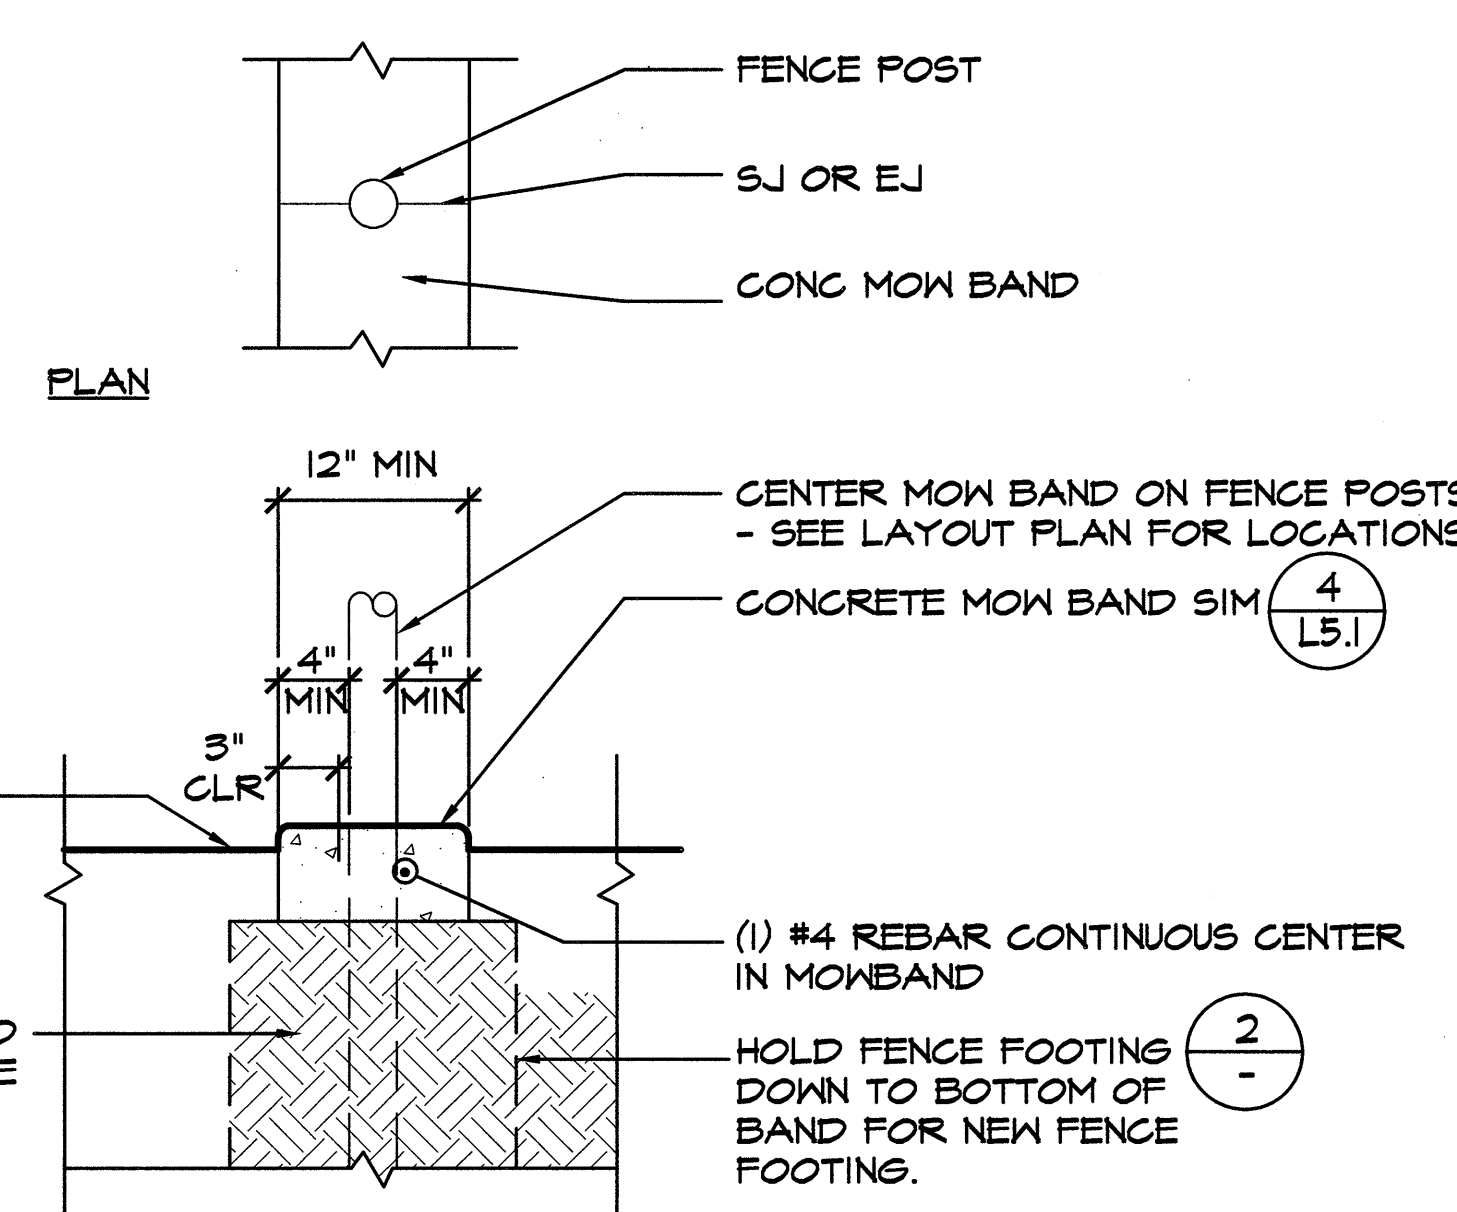

NOTE:
1. LOCATE EXPANSION JOINT W/ DOWEL AT EVERY THIRD POST
2. LOCATE AND ALIGN SCORE JOINTS AT EVERY POST.
3. COLOR TO BE NATURAL MEDIUM BROOM NON-SLIP FINISH.
4. PROVIDE MOCK-UP

5 CONCRETE MOW BAND @ FENCE

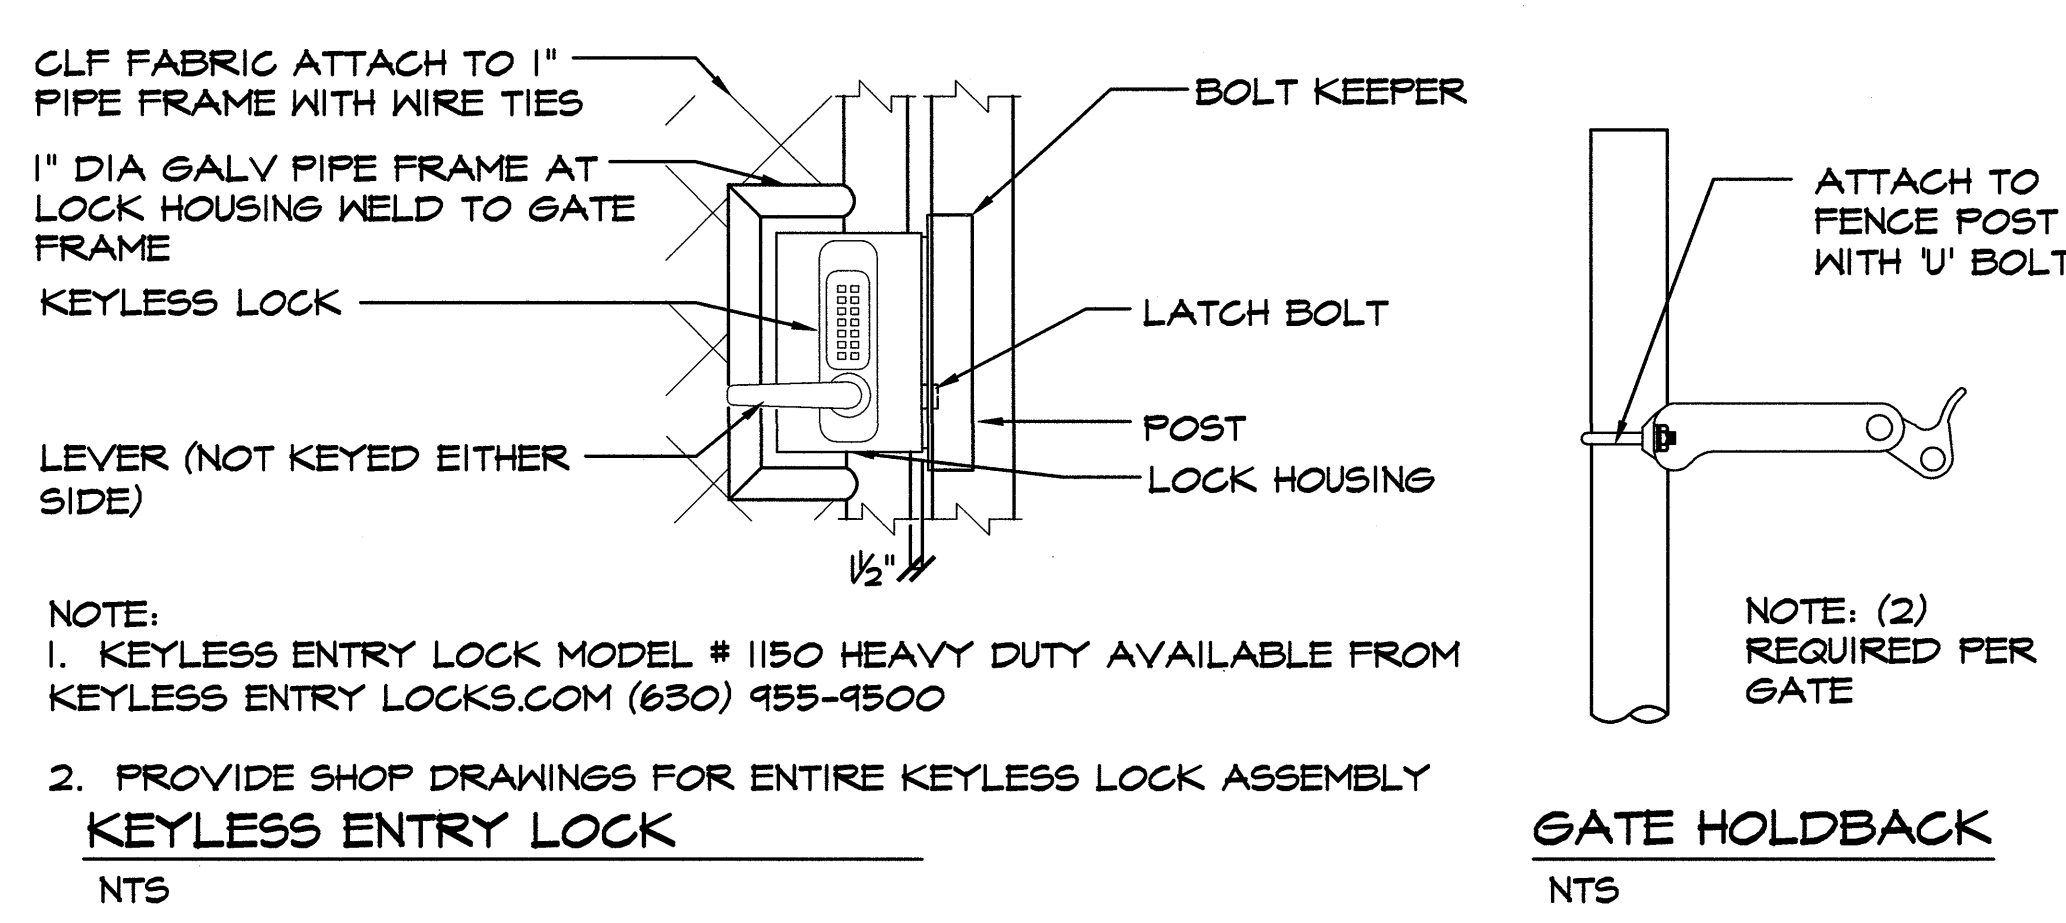


NOTE:
1. KEYLESS ENTRY LOCK MODEL # 1150 HEAVY DUTY AVAILABLE FROM KEYLESS ENTRY LOCKS.COM (630) 455-4500
2. PROVIDE SHOP DRAWINGS FOR ENTIRE KEYLESS LOCK ASSEMBLY

KEYLESS ENTRY LOCK

NOTE: GALVANIZE AND BLACK POWERCOAT (8-10 MIL) ALL GATE COMPONENTS TO MATCH VINYL CLF.

7 ACCESSIBLE DOUBLE GATE

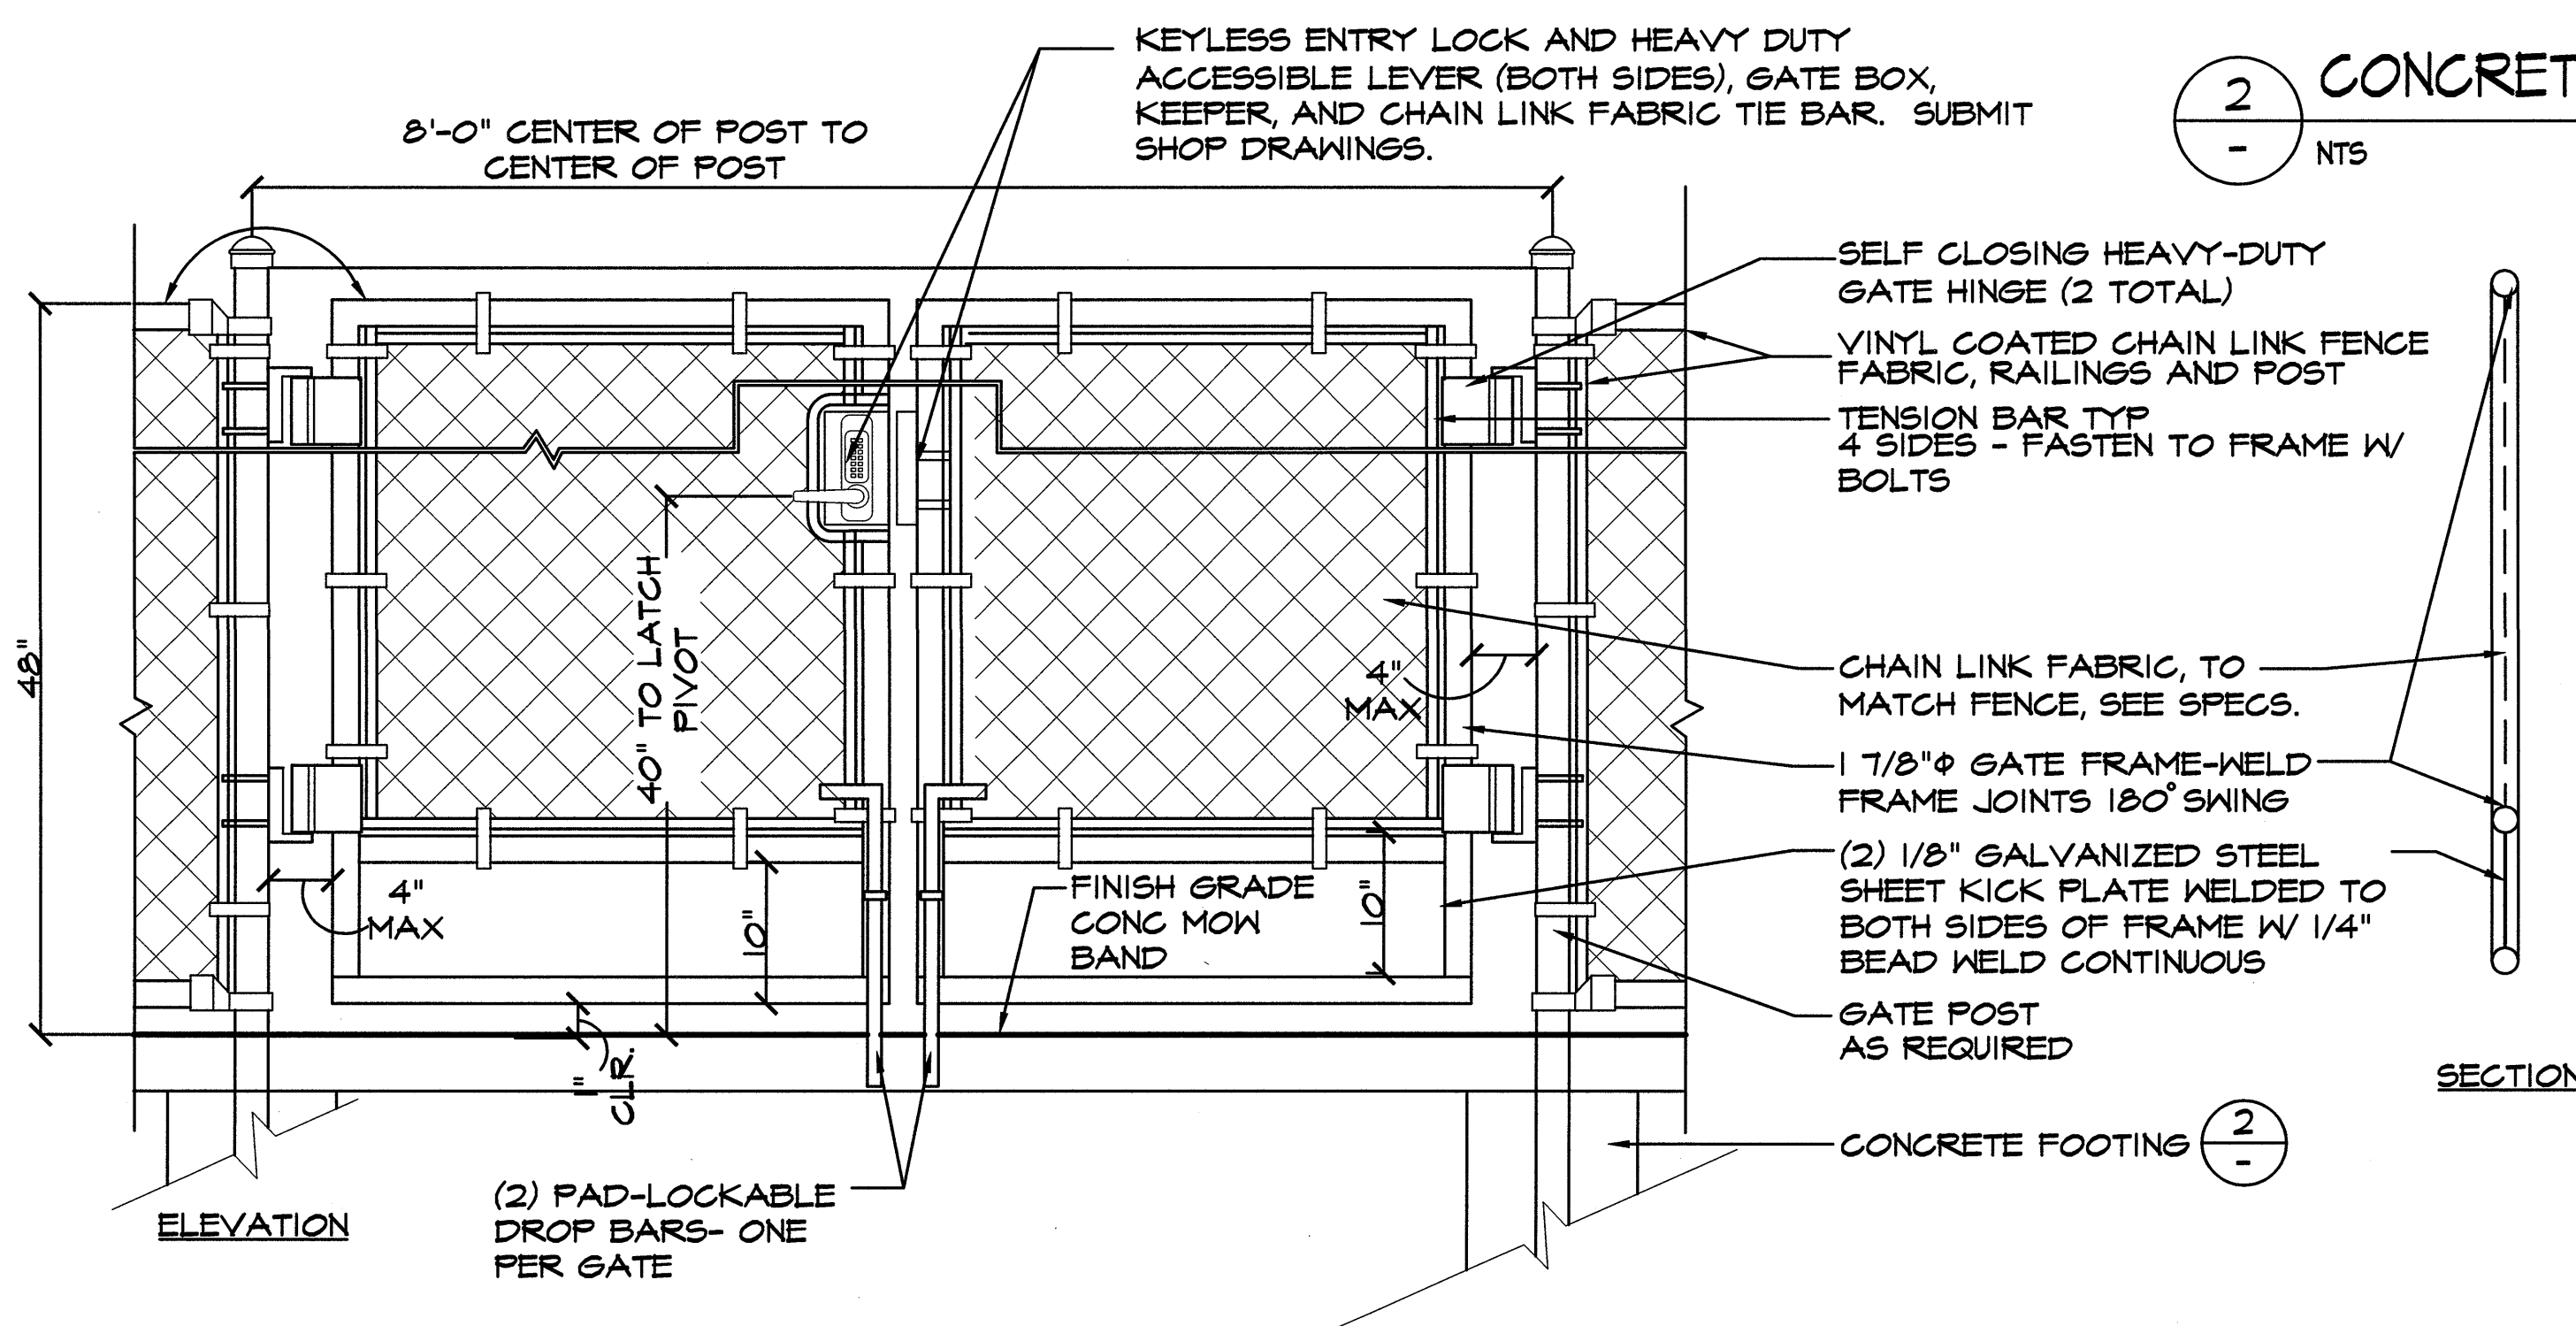

ELEVATION

SECTION



**MOUNTAIN VIEW
SENIOR CENTER**
266 ESCUELA AVE
MOUNTAIN VIEW, CA

DATE: 18 APRIL 2005


CONSTRUCTION SET

SHEET TITLE:


LANDSCAPE
CONSTRUCTION
DETAILS

DRAWN BY: PCD
CHECKED BY: VL
JOB NO: BSA 02-03

SHEET
L5.3

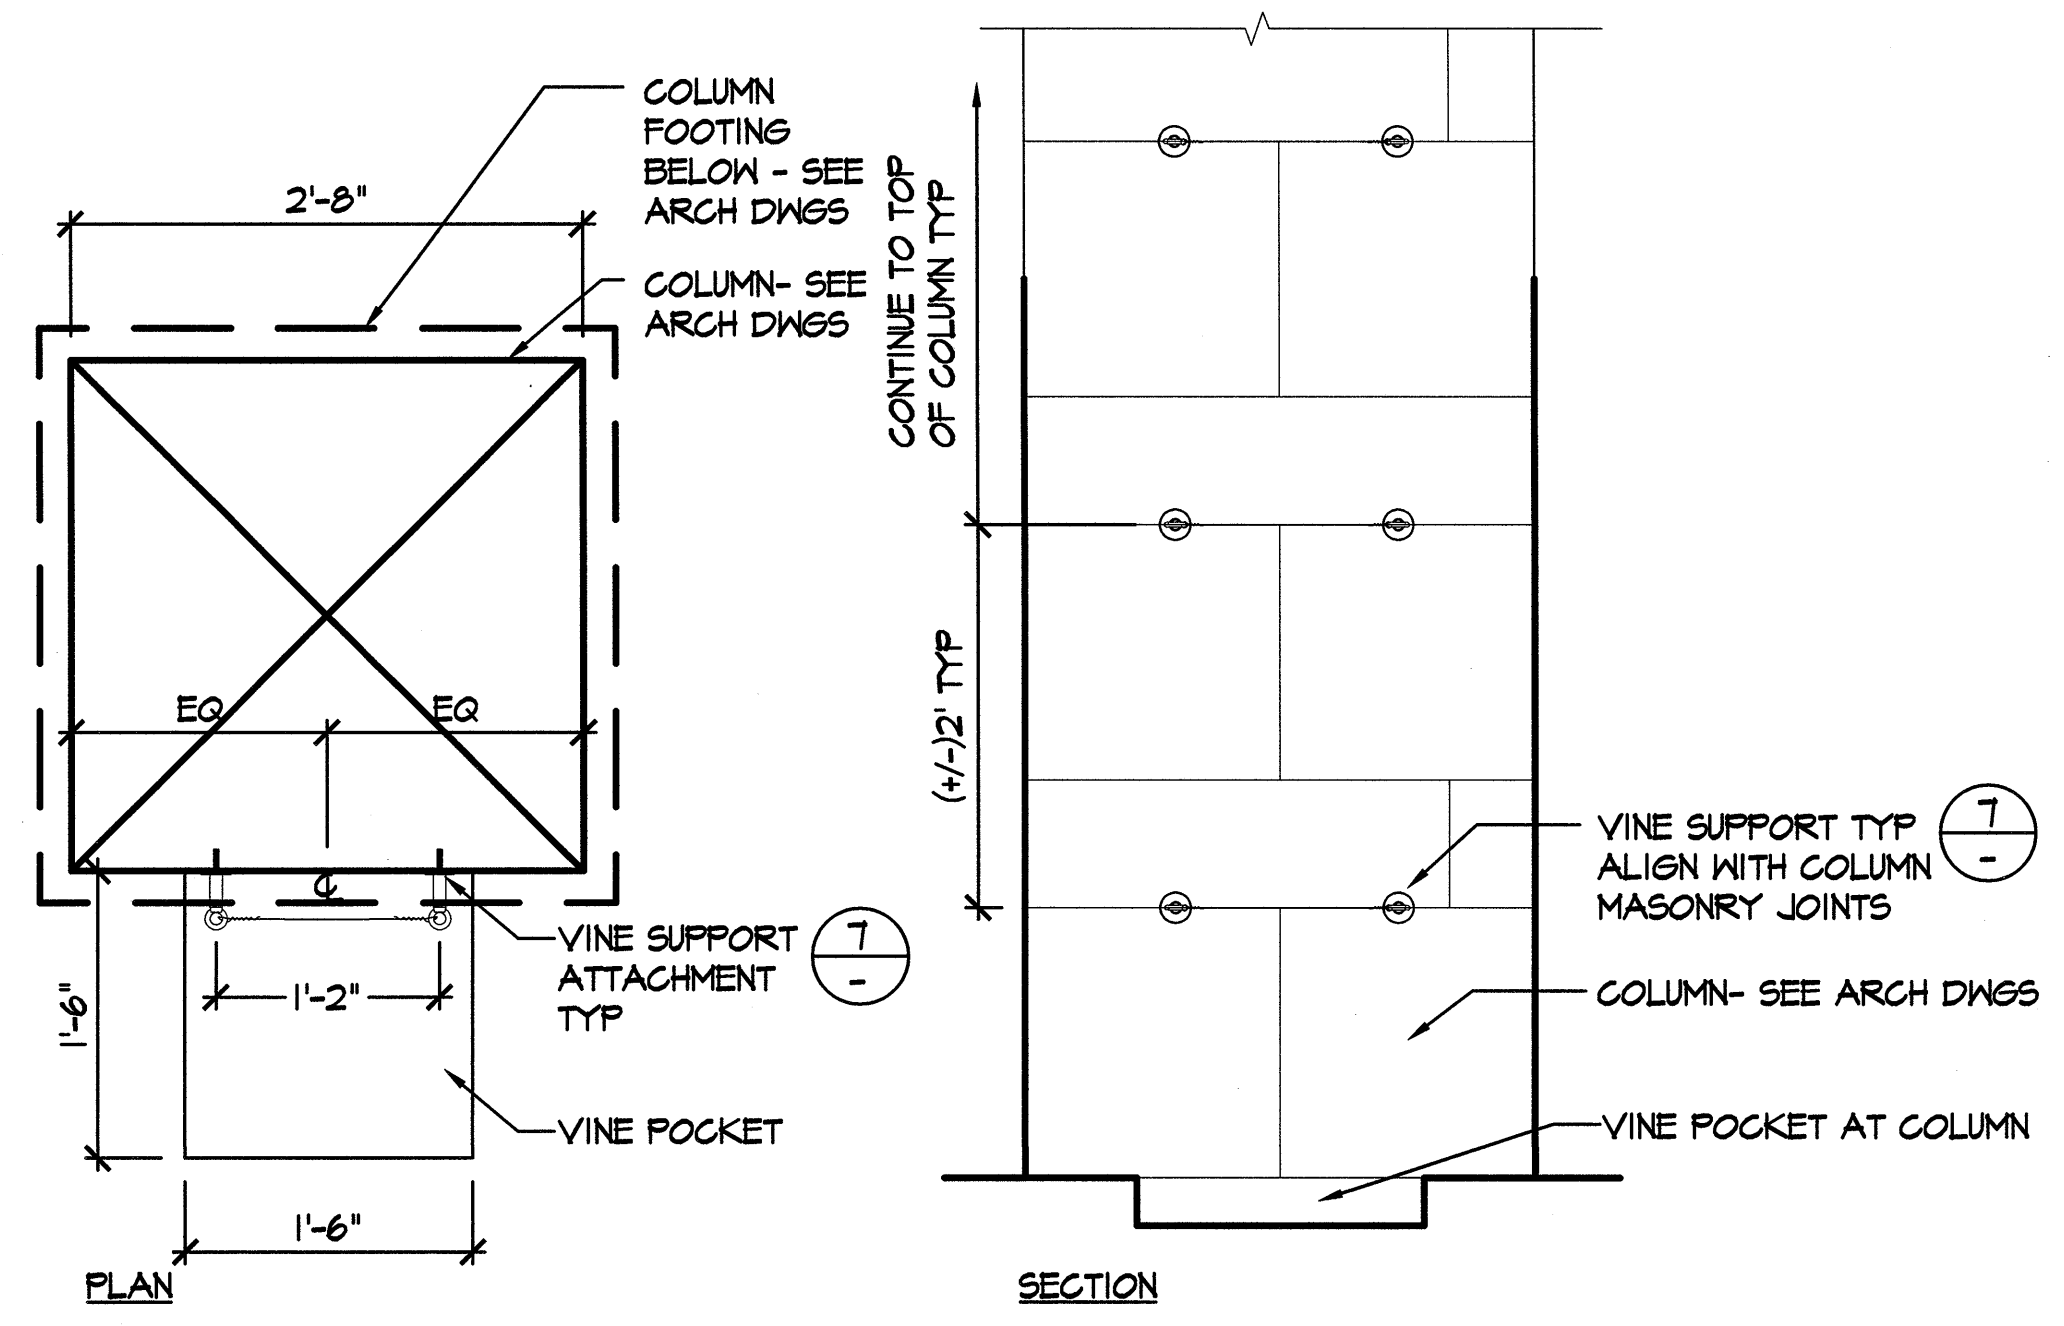


6 VINE SUPPORT LAYOUT
1"=1'-0"

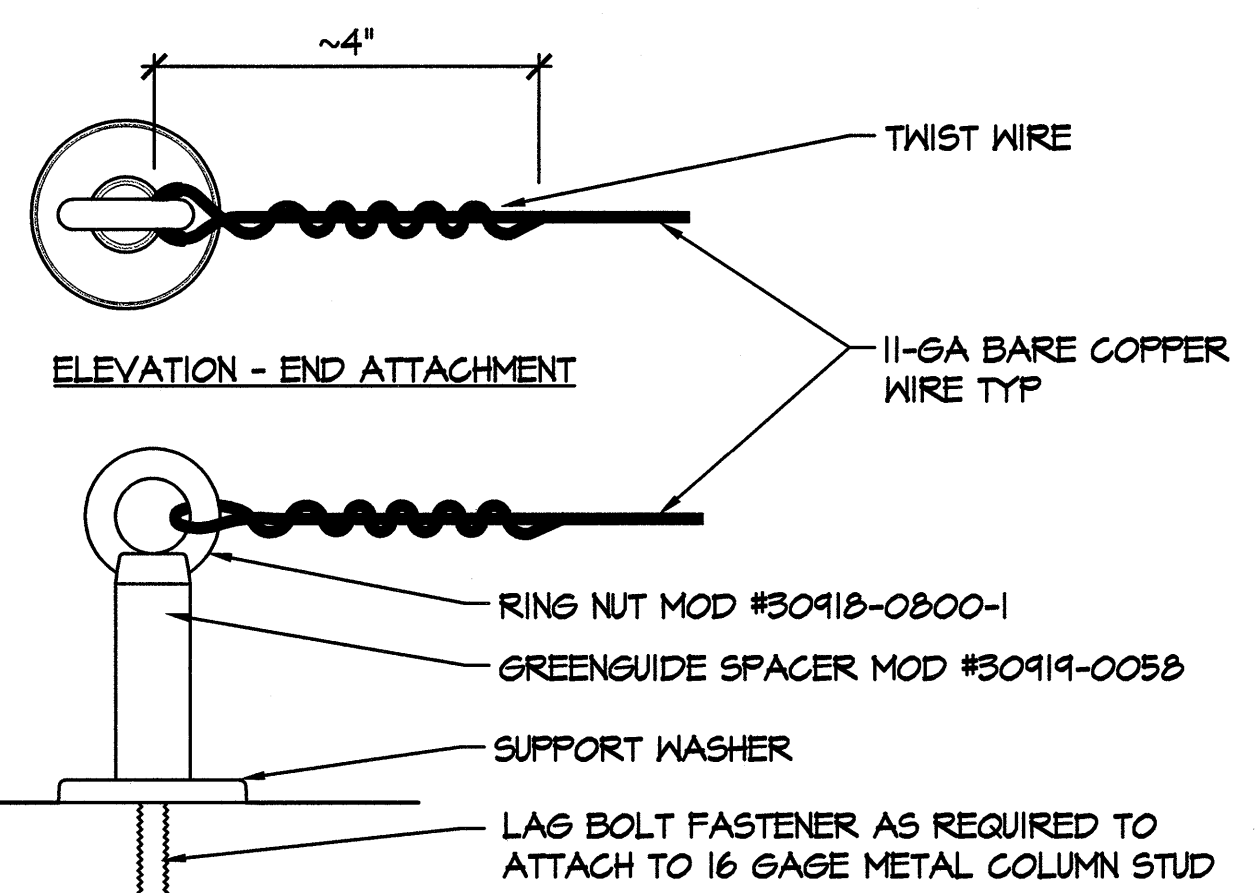

NOTES:
VINE SUPPORT AVAILABLE FROM JAKOB INC, (866) 525-6226






7 VINE SUPPORT & WIRE
HALF SIZE

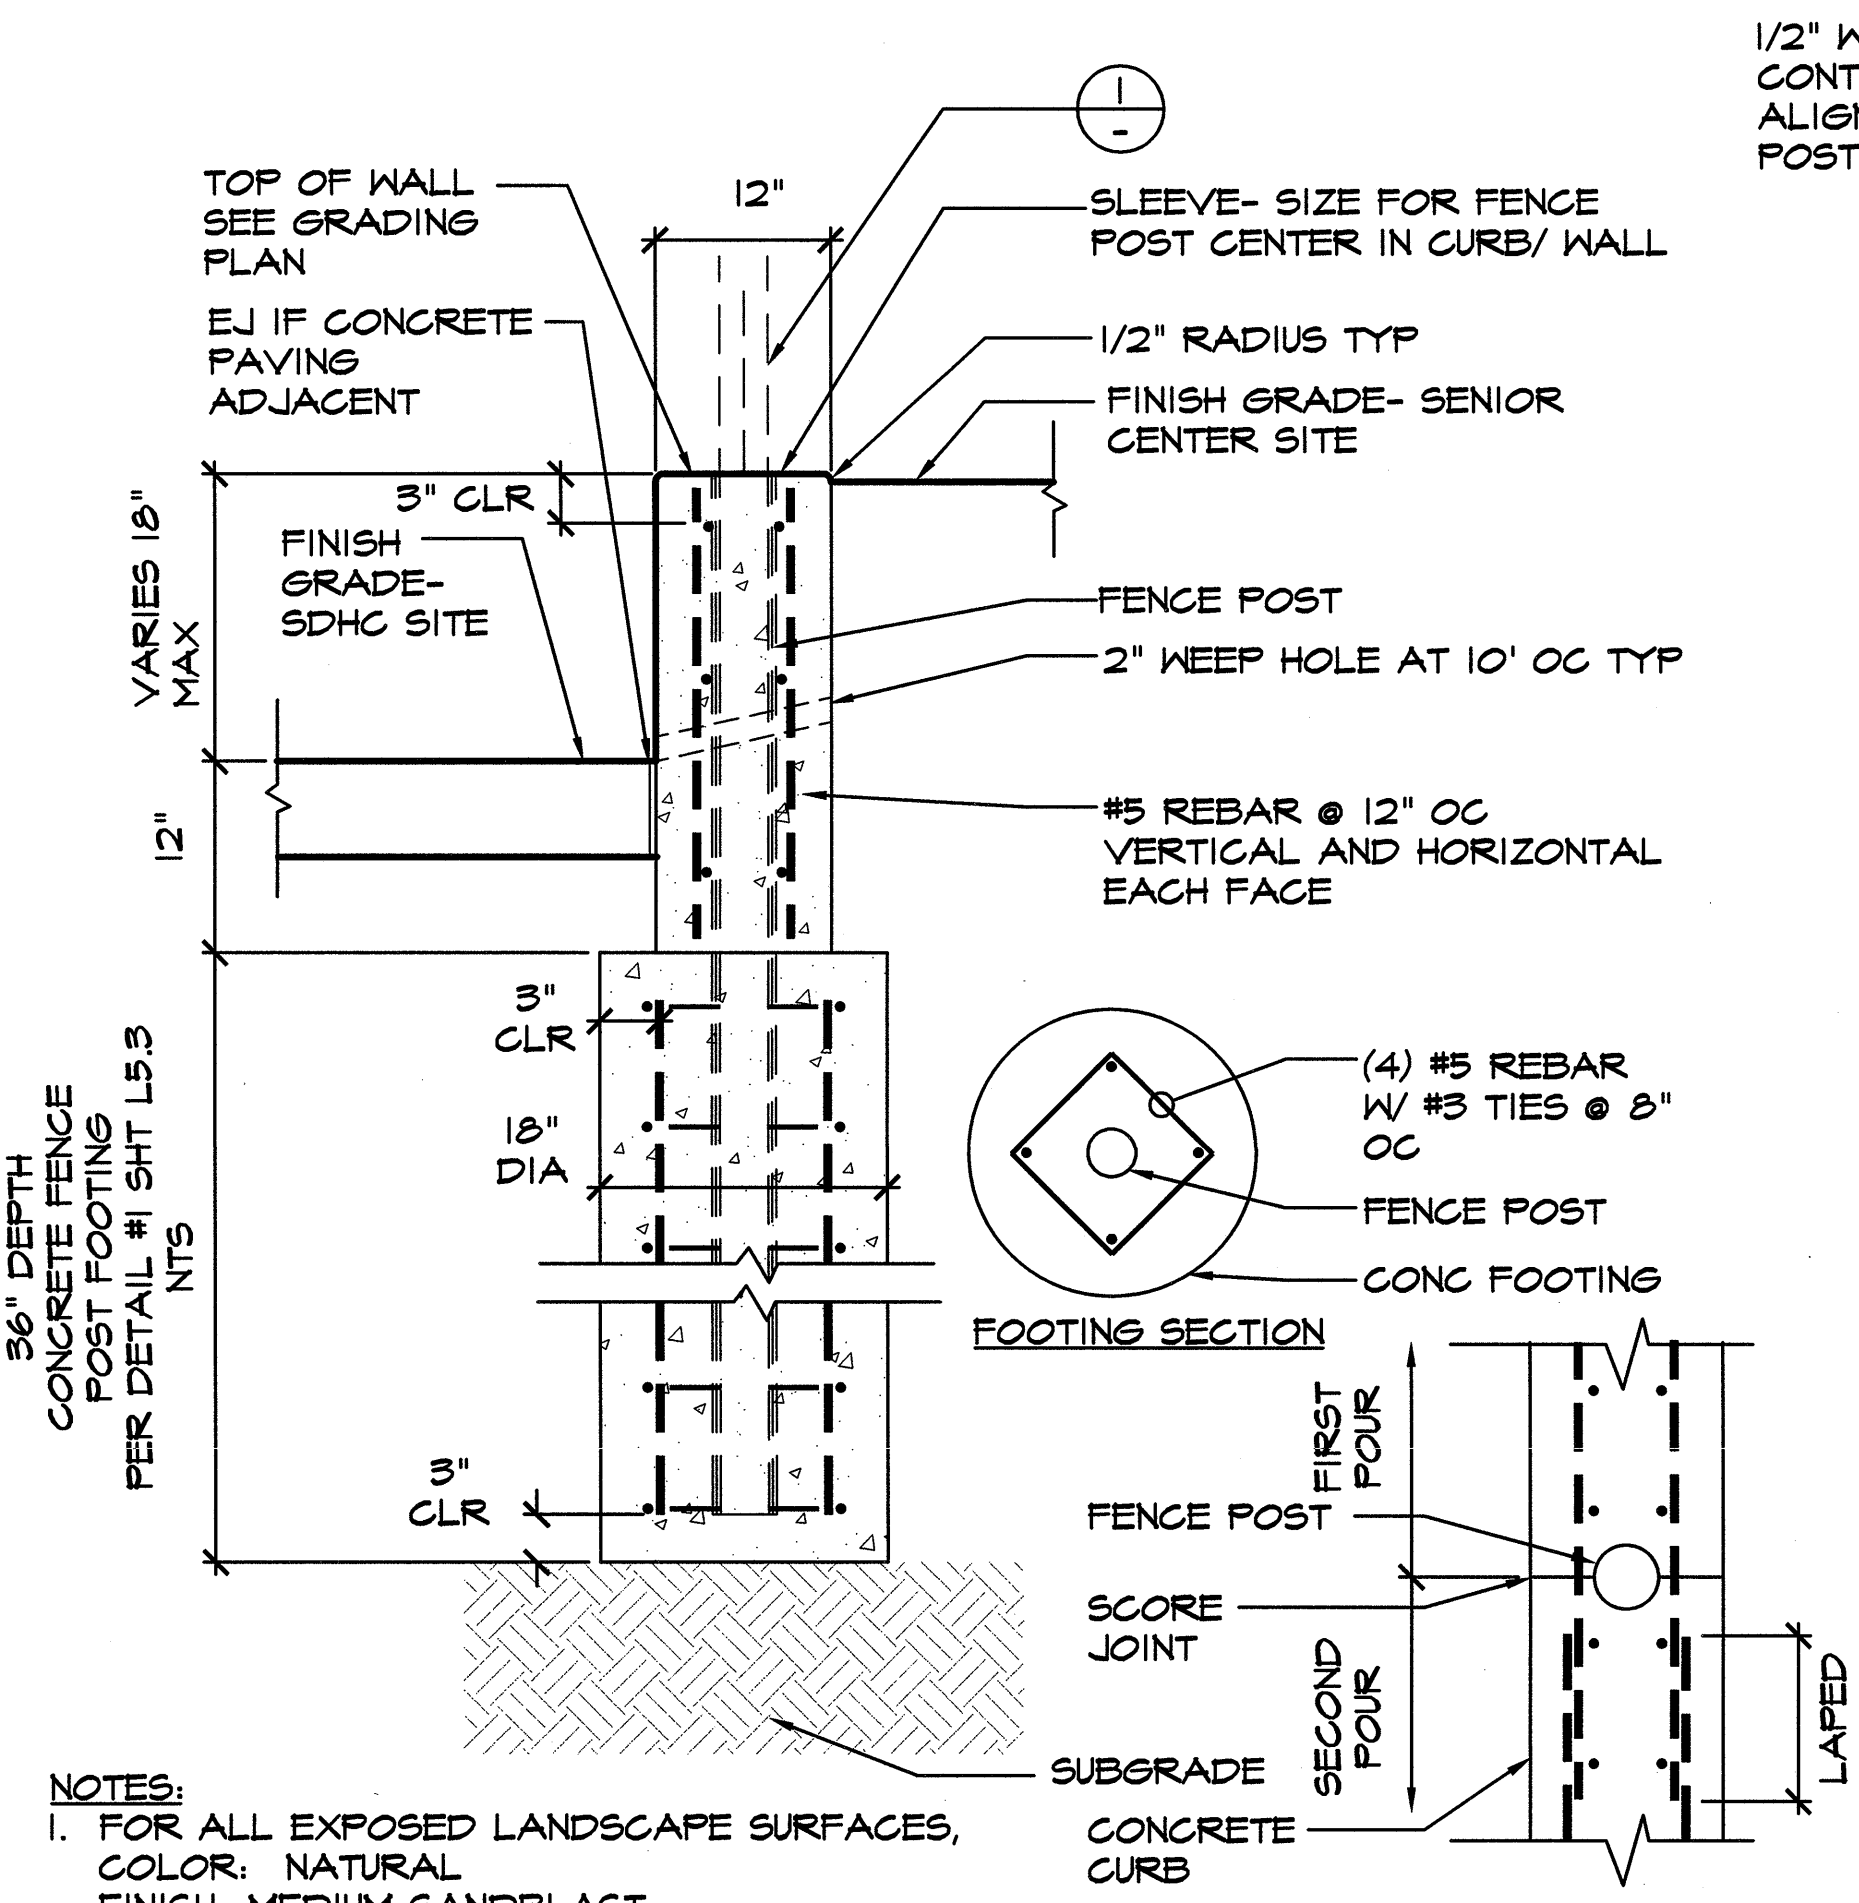



- NOTES:
1. FOR ALL EXPOSED LANDSCAPE SURFACES, COLOR: NATURAL FINISH: MEDIUM SANDBLAST
2. PROVIDE 4' SECTION MOCK-UP OF COLOR AND FINISH FOR APPROVAL BY LANDSCAPE ARCHITECT
3. PROVIDE EXPANSION JOINTS AT EVERY THIRD POST, PROVIDE TOOLED SCORE JOINTS AT ALL OTHER POSTS SIM CONCRETE PAVING
5. APPLY SILICONE BASED, TRANSPARENT CONCRETE SEALER TO ALL EXPOSED CONCRETE SURFACES.

4 CONCRETE CURB/ WALL
1"=1'-0"



5 NOT USED

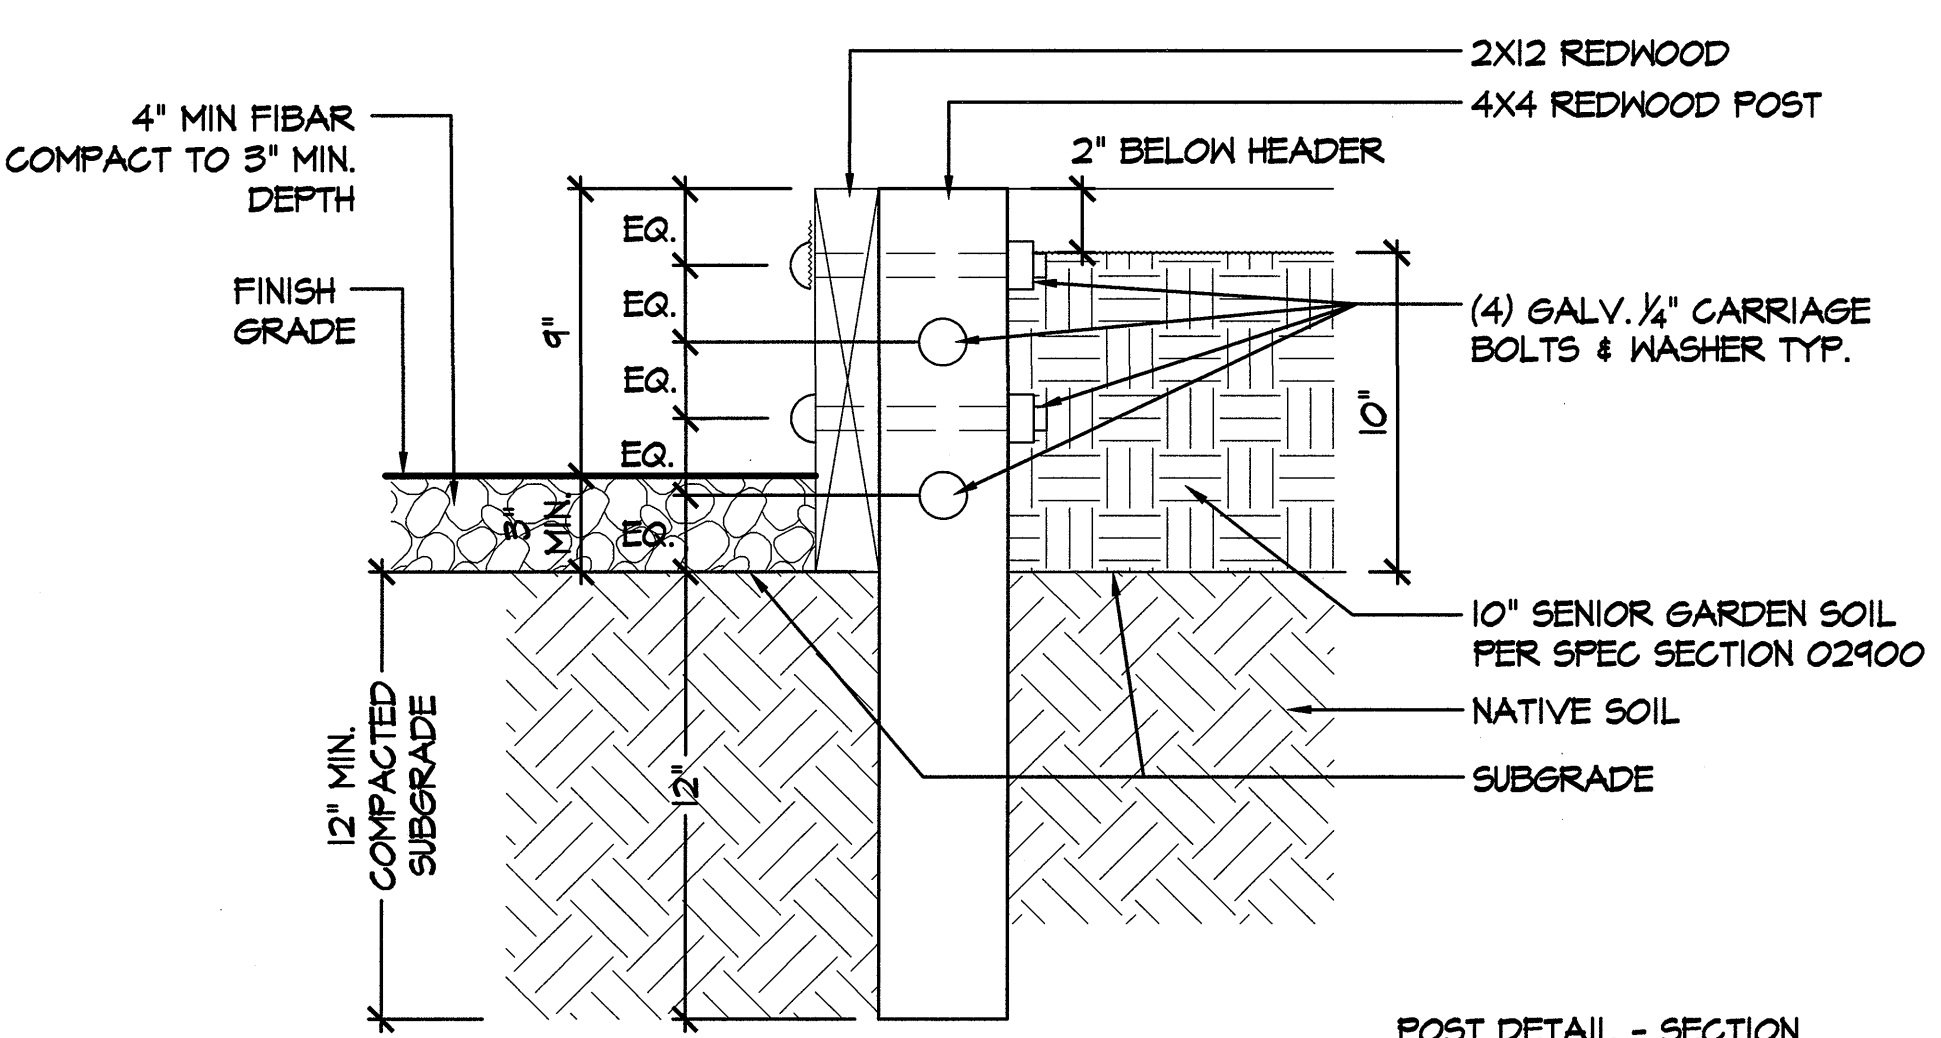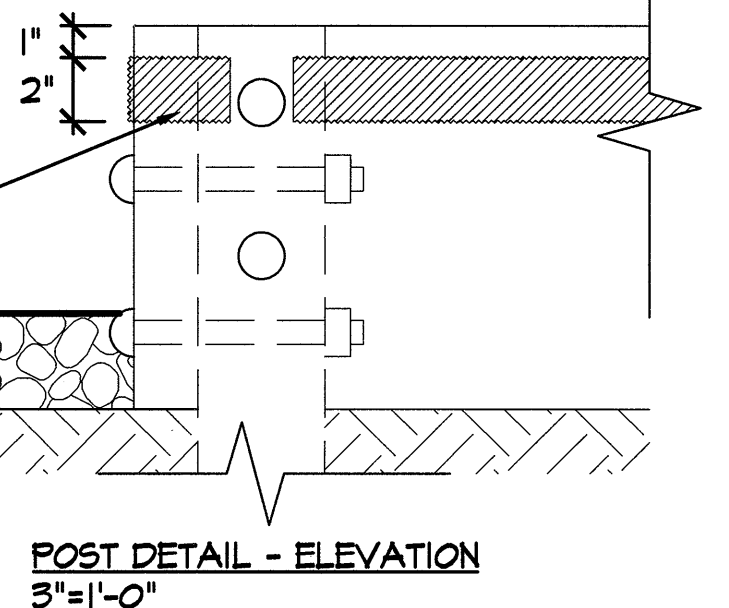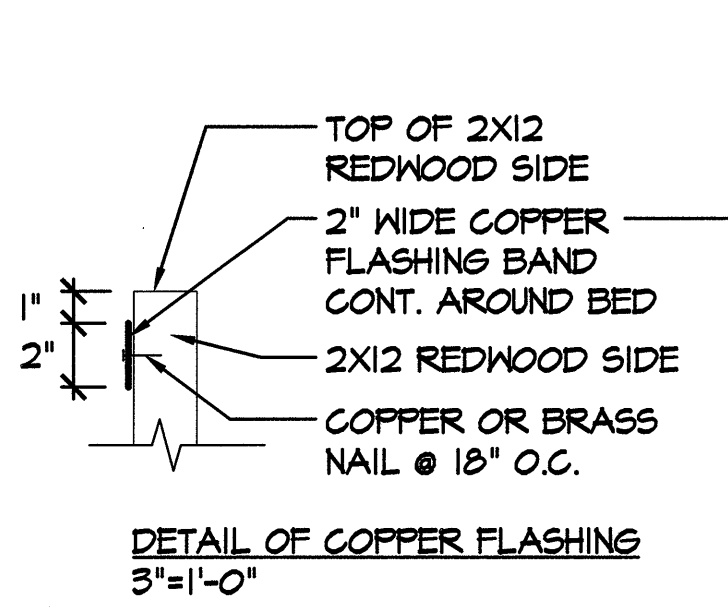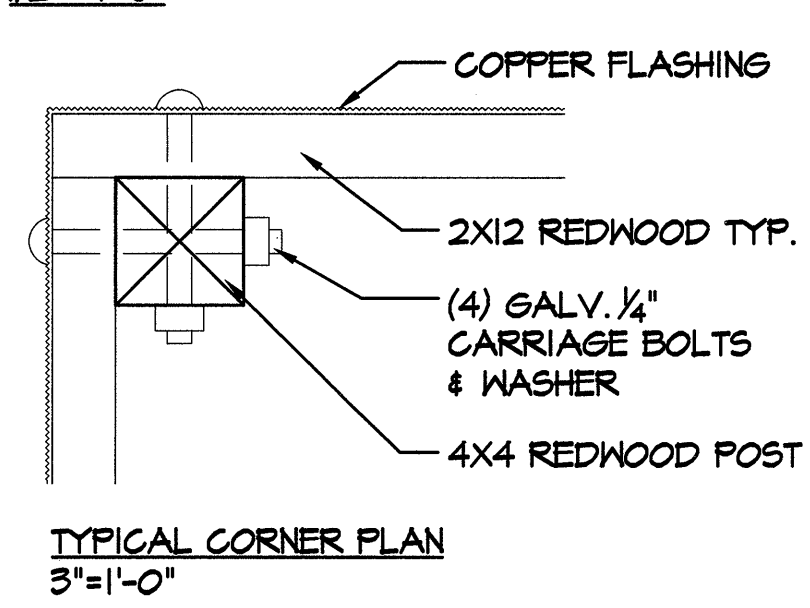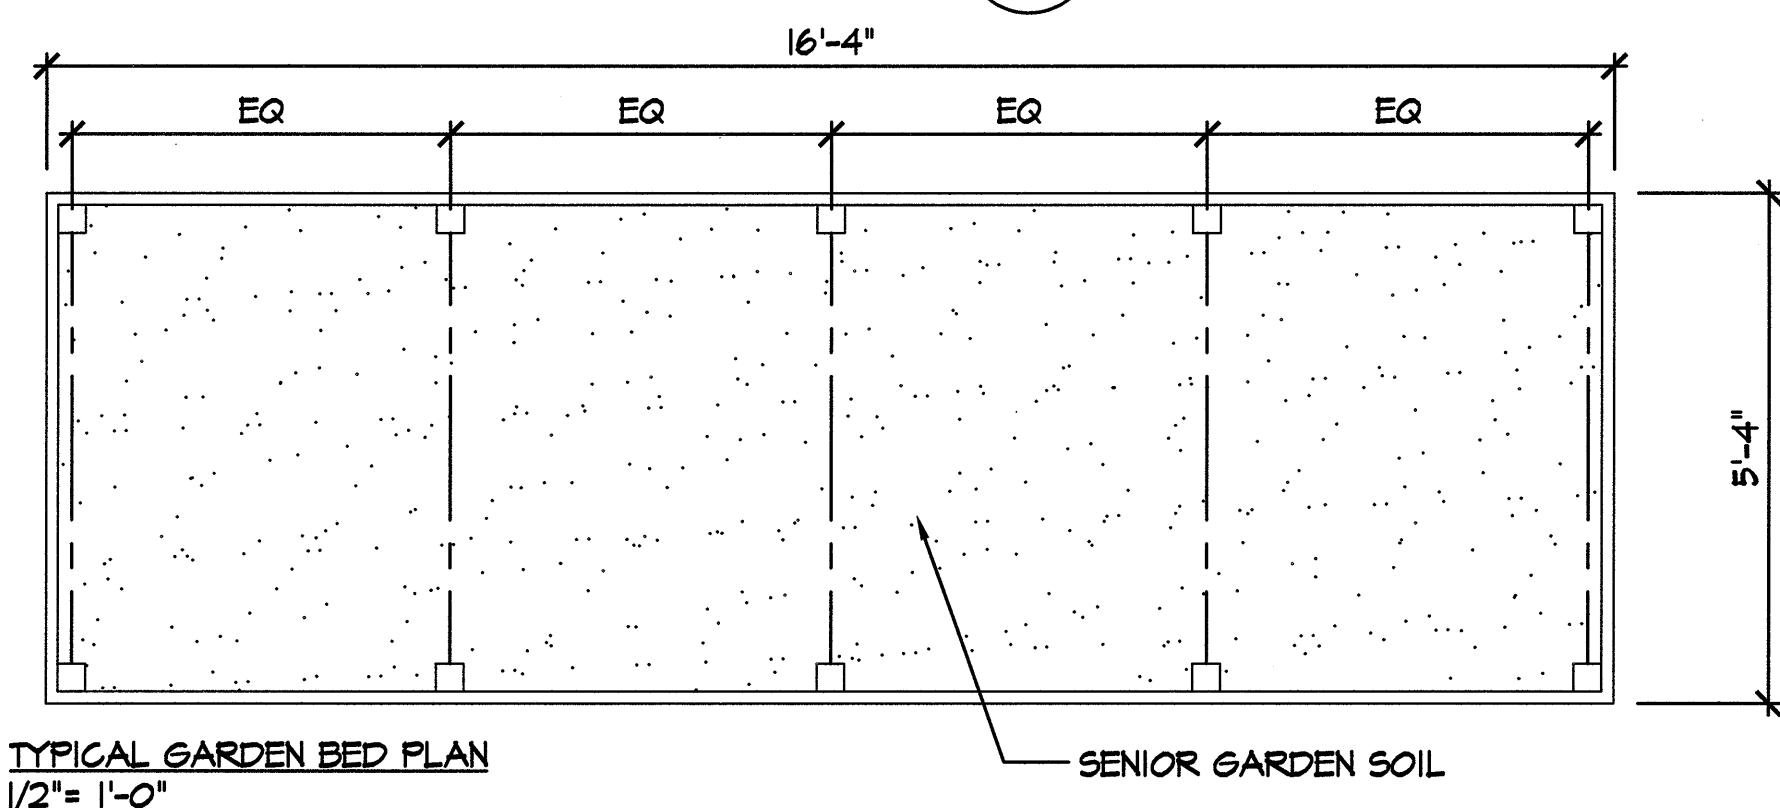


8 SENIOR GARDEN BED
AS SHOWN

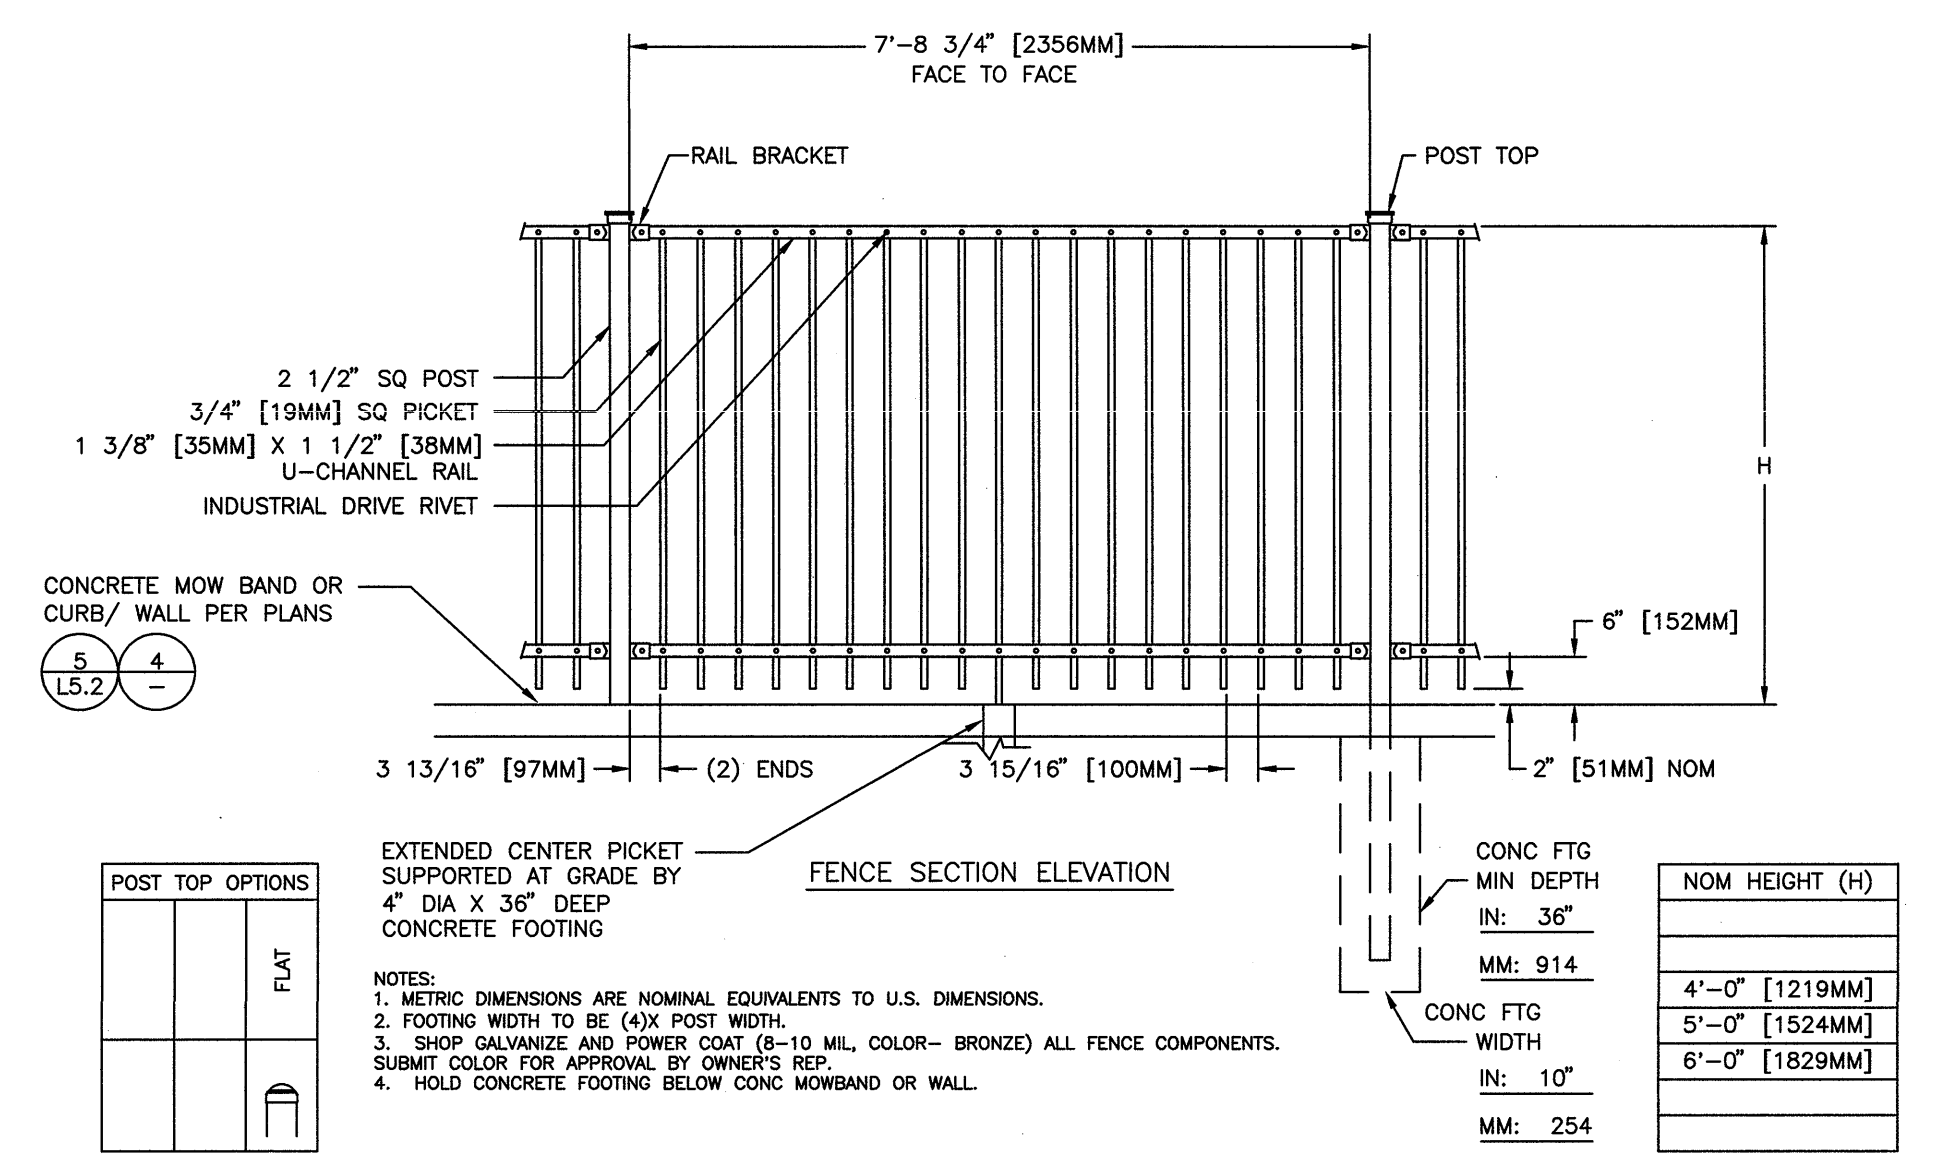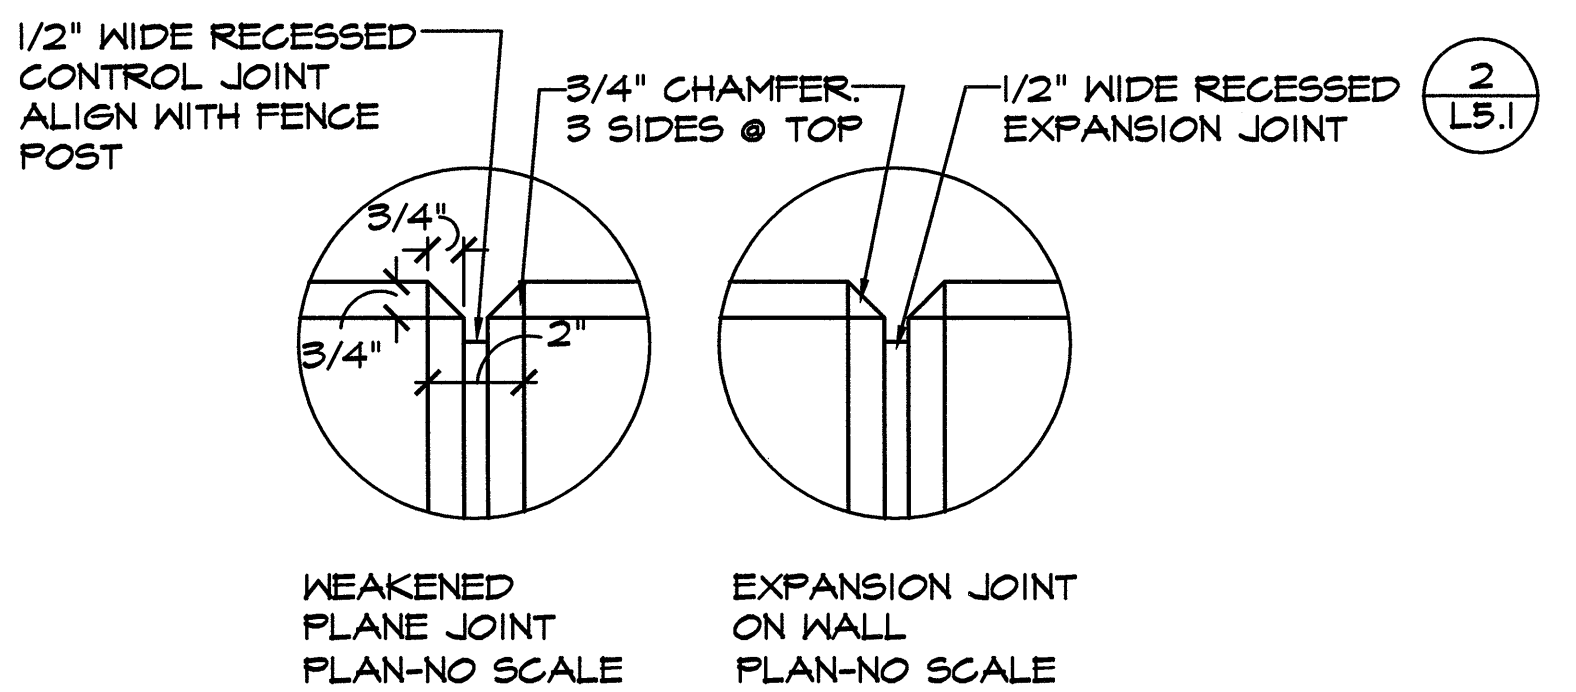

1 ORNAMENTAL METAL FENCE
NTS

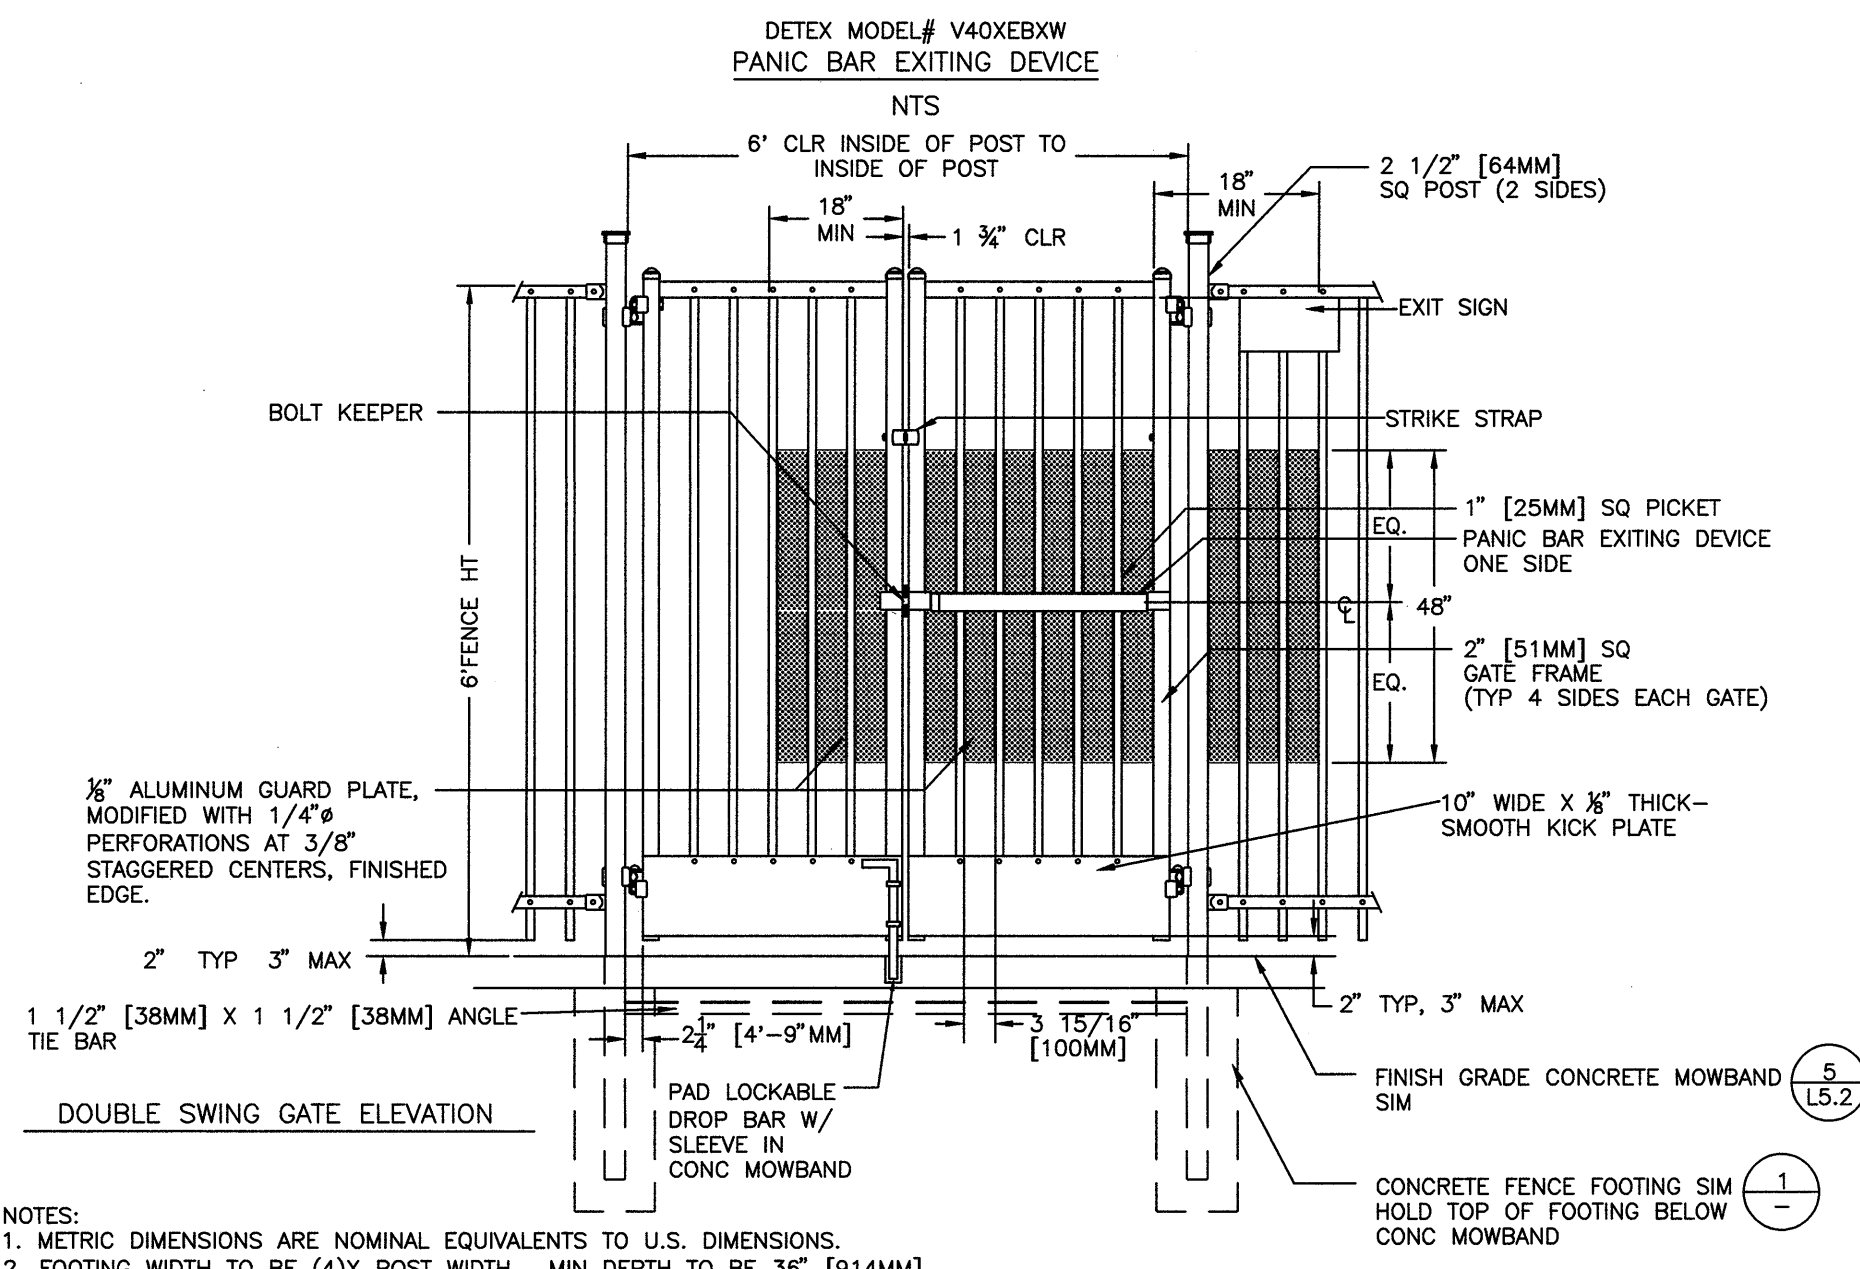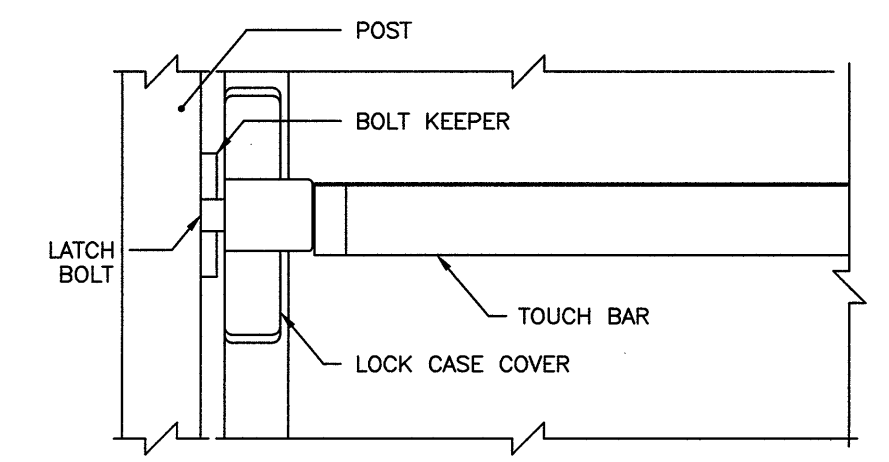

2 METAL SWING GATE SINGLE & DOUBLE
NTS

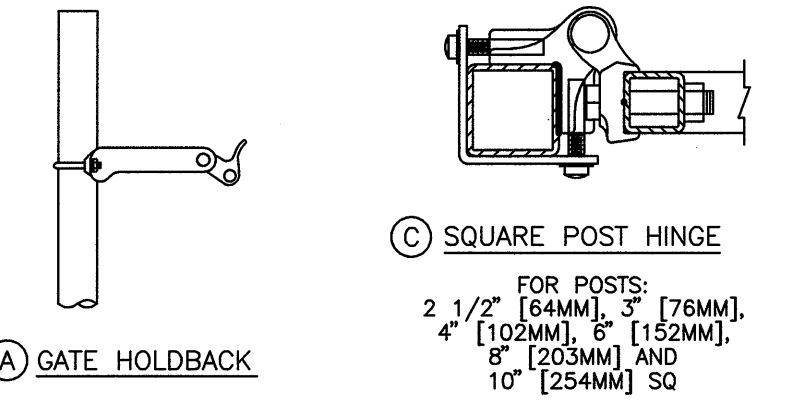

3 METAL GATE HARDWARE
NTS

Victor Stanley, Inc.


P.O. BOXER 330 • DUNKIN, NJ 07054 USA TEL. (201) 859-8300 • FAX (201) 257-7579 WEB SITE: http://www.victorstlaney.com	DRA2000_113 PG 1 OF 1
--	--------------------------

PRODUCT SPECIFICATIONS

IRONSITES[®] SERIES
S-42

36 Gallon Capacity
Optional S-2 Formed Dome Lid

All fabricated components are steel shot-blasted, etched, phosphatized, preheated and electrostatically powder-coated with TGIC polyester powder coatings.

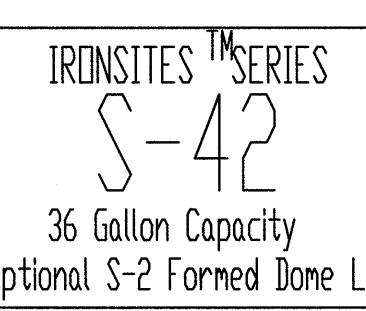


CADD Department
DRAWN R.D.M.

VIEWS 5
REV. 1/21/04


All specifications are subject to change. Please contact factory for details.

SIZE VIEW

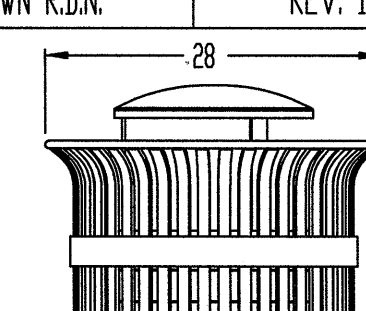

x All dimensions are in Inches x

UNDER VIEW

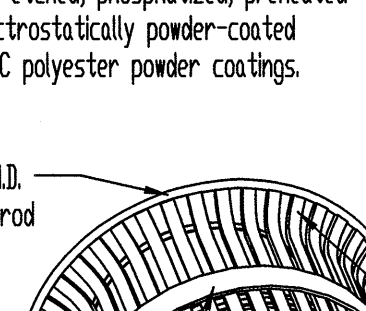

5/8" O.D. steel rod

(42) 3/8" x 1" solid steel bars

1/4" x 2-1/2" solid steel bars


3/4" Square center anchor bolt hole

(4) Leveling Feet with a 3/8" diameter threaded steel shaft


Finished grade

Copyright 2004 Victor Stanley, Inc.
All Rights Reserved

CUT SECTION



TOP VIEW



3 LITTER RECEPTACLE W/ LATCH
- NTS

Victor Stanley, Inc.

P.L. DRAWER 330 - BUNKER, MD 20754 USA
TEL. (301) 855-8300 - FAX (410) 257-1579

PRODUCT SPECIFICATIONS	CADD Department	Pg 1 of 1
	DRAWN RJD	VIEW 6
		REV. 12/16/96

S-42 * BASE ASSEMBLY *

(Typical Anchoring Detail)
(Leveling Foot Detail)

All fabricated components are steel shot-blasted, enriched, phosphatized and electrostatically powder-coated with TIGER polyester powder coatings.

(4) Adjustable glides welded around inner perimeter of base steel band

CUT SECTION

Fully welded joints throughout

Bands are rolled from 1/4" x 2-1/2" solid steel bar

Base supports are made of 3/8" x 3" solid steel bar

For additional information on the S-42 Litter Receptacle, please refer to the S-42 standard specifications.

FOOT DETAIL

1-1/8" diameter x 7/16" thick adjustable glides

3/8" diameter threaded steel shaft

PERSPECTIVE

Copyright 1996
Victor Stanley, Inc.
All Rights Reserved.

4 LITTER RECEPTACLE MOUNTING

SECTION

LITTER RECEPTACLE

CONC. FOOTING SIM

FINISH GRADE MULCH

90 % COMPACTED SUBGRADE

EDGE OF PAVING PER PLAN

ANCHOR BOLT

PLAN

EQ

EQ

5'

1'-6"

R1'-6"

LITTER RECEPTACLE

ANCHOR BOLT

LITTER RECEPTACLE FOOTING AT PLANTING AREA

5

1"= 10'

4

-

3

1.5

1.5

VICTOR STANLEY, INC.
Manufacturers of Quality Site Peripherals since 1924

571 DUBOIS BLVD - BUNKER, MO 20754 USA
TELL FREE: (800) 368-2573 USA & CANADA
TELL: (800) 855-8200 - FAX: (800) 250-7259
WEB SITE: [HTTP://WWW.VICTORSTANLEY.COM](http://www.victorstanley.com)

AVAILABLE OPTIONS:

POWDER COATING

BY STANDARD COLORS, CUSTOM COLORS (INCLUDING THE RAL RANGE)

INTERMEDIATE & CENTER ARRESTS

4', 6', & 8' AVAILABLE WITH OPTIONAL ARREST

LENGTHS

STANDARD 4'
STANDARD 6' LENGTH SHOWN
STANDARD 8'

NOTES:

1. DRAWING NOT TO SCALE. DO NOT SCALE DRAWINGS.
2. ALL FABRICATED METAL COMPONENTS ARE STEEL (HOTROLATED, EPOXYED, PHOSPHATEATED, PREPAINTED, AND ELECTROSTATICALLY POWDER-COATED WITH 100% POLYESTER POWDER COATINGS. PRODUCTS ARE FULLY CLEANED AND PRETREATED, PRIMERED AND COATED WHILE HOT TO FILL CRACKS AND BUILD COATING FILM. COATED PARTS ARE THEN FULLY CURED TO COATING MANUFACTURER'S SPECIFICATIONS. THE THICKNESS OF THE RESULTING FINISH COAT AVERAGES 8-10 MILS (20-250 MICRONS).
3. IT IS NOT RECOMMENDED TO LOCATE ANCHOR BOLTS UNTIL WHICH IS IN PLACE. THIS VICTOR STANLEY, INC. PRODUCT MUST BE PERMANENTLY ATTACHED TO THE GROUND. CONSULT YOUR LOCAL CODES FOR REGULATIONS.
4. ANCHOR BOLTS PROVIDED BY OTHERS.
5. FOR HIGH DUST/ABRASIVE CLIMATES, HOT DIP GALVANIZING BEFORE POWDER COATING IS AVAILABLE. SEE WRITTEN SPECIFICATIONS FOR DETAILS.
6. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONTACT MANUFACTURER FOR DETAILS.
7. THIS PRODUCT IS SHIPPED FULLY ASSEMBLED.

RB-12

STEEL SITES® RB SERIES STANDARD ALL STEEL BACKLASH BOND
SHOWN STANDARD 6-FEET LENGTH

COPYRIGHT 2003 VICTOR STANLEY, INC. ALL RIGHTS RESERVED

REV. 8/11/83 DRAWN LKP.

1 BACKLESS BENCH
- NTS

VICTOR STANLEY, INC.
Manufacturers of Quality Steel Furniture since 1965

P.O. BOX 238 • BUNKER, MI 48254 USA
 TEL. (734) 282-0800 • 800-257-0753 • FAX (734) 282-7079
 WEB SITE: <http://www.victorst Stanley.com>

AVAILABLE OPTIONS:

POWDER COATING:

IN STANDARD COLORS; CUSTOM COLORS (INCLUDING THE RAL RANGE)

LENGTH

STANDARD 6' LENGTH SHOWN

CUSTOM PLUMBES

ENGRAVED CAST BRONZE PLUMBES

ARMREST

AVAILABLE WITH OPTIONAL CENTER ARMREST

NOTES:

1. DRAWING NOT TO SCALE. DO NOT SCALE DRAWINGS.
2. ALL FABRICATED METAL COMPONENTS ARE STEEL SUBTREATED, ENGRAVED, PHOSPHATIZED, PRIMERED, AND ELECTROSTATICALLY POWDER-COATED WITH TACTIC POLYESTER POWDER COATING. PRODUCTS ARE FULLY CLEANER AND PRETREATED, PRIMERED AND COATED WHILE HOT TO FILL CRACKS AND BUILD COATING FILM. COATED PARTS ARE THEN FULLY CURED TO COATING MANUFACTURER'S SPECIFICATIONS. THE THICKNESS OF THE RESULTING FINISH COAT AVERAGES 8-10 MILS COAT-250 MICRONS.
3. IT IS NOT RECOMMENDED TO LOAD ARMREST BOLTS UNTIL BOLCH IS IN PLACE. THIS VICTOR STANLEY, INC. PRODUCT MUST BE PERMANENTLY AFFIXED TO THE GROUND. CONSULT YOUR LOCAL CODES FOR REGULATIONS.
4. ARMREST BOLTS PROVIDED BY OTHERS.
5. FOR HIGH-SALT AIRBORNE CLIMATES, HOT-UP GALVANIZING BEFORE POWDER COATING IS AVAILABLE. SEE WRITTEN SPECIFICATIONS FOR DETAILS.
6. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONTACT MANUFACTURER FOR DETAILS.
7. THIS PRODUCT IS SHIPPED FULLY ASSEMBLED.


RMFC-24

STEEL SITES™ RMB SERIES

STANDARD ALL STEEL BENCH
 SHOWN STANDARD 6-FOOT LENGTH

COPYRIGHT 2003 VICTOR STANLEY, INC. ALL RIGHTS RESERVED

2 BENCH W/ BACK
- NTS



CARDUCCI & ASSOCIATES, INC.
LANDSCAPE ARCHITECTURE PLANNING
IRREGULAR DESIGN URBAN DESIGN

55 BEACH STREET, 4TH FLOOR
SAN FRANCISCO, CALIFORNIA 94113

☐ (415) 674-0900 FAX (415) 674-0999

If the contractor encounters errors or discrepancies on the drawings, or if conditions actually present or deny the completion of work as indicated, the contractor shall notify the owner immediately as described by the time a list of all such errors, discrepancies and omissions. The contractor shall immediately notify the landscape architect and the owner's firm. If after controlling for the items, he may reasonably determine because of the nature of the errors, discrepancies or omissions on the time of

**MOUNTAIN VIEW
SENIOR CENTER**

266 ESCUELA AVE
MOUNTAIN VIEW, CA

DATE: 18 APRIL 2005

CONSTRUCTION
SET

SHEET TITLE:

LANDSCAPE
CONSTRUCTION
DETAILS